



德力欧科技发展有限公司
DELIOU TECHNOLOGY DEVELOPMENT CO., LTD.,



产品画册

PRODUCT BROCHURE



地址：长沙市岳麓区新麓谷长海中心A2楼 9楼德力欧科技

电话：19067316406
网址：www.deliou8848.com

Address: 9/F, A2 Building, Changhai Center,
New Lugu, Yuelu District, Changsha,
China Deliou Technology

Tel: +86 19067316406
Website: www.deliou8848.com

德力欧科技发展有限公司
DELIOU TECHNOLOGY DEVELOPMENT CO., LTD.,

公司介绍

COMPANY INTRODUCTION

德力欧有限公司，您信赖的印刷解决方案合作伙伴！

德力欧是一家集生产、研发、销售、仓储为一体的综合性企业。我们致力于提供高质量的印刷设备和耗材。

我们的产品包括丝网印刷、曝光机、移印机、DTF印刷机、热压机等。真正帮客户实现了一站式采购丝印耗材、设备。

除了这些印刷设备，我们还是各种一流耗材的授权代理商。我们提供Autotype Photo Emulsion、忠义油墨、MalaiBin油墨、NBC网和Fimor刮刀。这些产品以其卓越的质量和可靠性而闻名，确保您的印刷项目获得最佳效果。

德力欧以“品质、服务、速度、价值”作为我们的核心经营理念不断进取。我们承诺，我们将秉承初心，以严苛的检验标准来控制品质，以用心的服务态度来对待客户，以高效的ERP仓储系统和管理来提升发货速度，努力为客户朋友们提供优质的产品。

Deliou Technology Development Co., Ltd. your trusted partner for printing solutions!

Deliou is a comprehensive enterprise integrating production, research and development, sales and warehousing. We are committed to providing high quality printing equipment and consumables.

Our products include screen printing, exposure machine, pad printing machine, DTF printing machine, heat press and so on. We really help our customers to realize one-stop purchase of screen printing consumables and equipment.

In addition to these printing equipments, we are also the authorized agent of various first-class consumables. We offer Autotype Photo Emulsion, Chung-Yi Ink, MalaiBin Ink, NBC Mesh and Fimor Squeegee. These products are known for their superior quality and reliability, ensuring the best results for your printing projects.

At Deliou, we are driven by our core business philosophy of “Quality, Service, Speed and Value”. We promise that we will keep our original intention, control the quality with strict inspection standards, treat customers with heartfelt service attitude, improve the delivery speed with efficient ERP warehousing system and management, and endeavor to provide customers and friends with high quality products.



成立于
2013年
Established in 2013

半自动高精密丝印机

Semi-automatic high precision screen printing machine

此款丝印机，做工精细，实用性强，性价比高。综合性微调装置，适应不同的印刷需求。可选吸气真空台面。精磨高强度工作台，均布吸气孔，强力真空吸附，保证多色套色准确。工作台可进行左右及平面摆角微调，印刷精度高，调校方便。自动平衡刮刀，可保证印刷压力均衡；气动抬刀功能，省时高效。

This screen printing machine, fine workmanship, practical and cost-effective. Comprehensive micro-adjustment device to adapt to different printing needs. Optional suction vacuum table. Precision grinding and high hardness worktable, evenly distributed suction holes, strong vacuum adsorption, to ensure the accuracy of multi-color registration. The working table can be fine-tuned for left, right and plane swing angle, with high printing precision and easy adjustment. Automatic balancing squeegee ensures equalized printing pressure; pneumatic knife lifting function saves time and efficiency.



4060PN/V



3050PN/V



4060HN/V



3050HPN/V

半自动高精密丝印机

Flat Manual Screen Printing Table

型号 Model	4060PN	4060PV	3050PN	3050PV	4060HN	4060HV	3050HPN	3050HPV
台面尺寸(mm) Countertop Size	400*600	400*600	300*500	300*500	400*600	400*600	300*500	300*500
台面特点 Countertop Features	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum
最大印刷面积(mm) Max. printing area	350*550	350*550	280*400	280*400	350*550	350*550	250*350	250*350
最大印刷高度(mm) Max. print height	80	80	80	80	80	80	80	80
功率(w) Power	40	40	40	40	40	40	40	40
气压(bar) Pressure	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
印刷速度(次/时) Printing speed (Pcs/h)	1200	1200	1200	1200	1200	1200	1200	1200
最大网框外径(mm) Max. frame outer diameter	500*800	500*800	400*600	400*600	500*800	500*800	400*550	400*550
驱动方式 Driving method	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic
产品尺寸(mm) Product Size	850*980*1040	850*980*1040	740*800*1130	740*800*1130	960*880*1650	960*880*1650	750*750*1600	750*750*1600
重量(kg) Product weight	180	180	120	120	250	250	180	180

型号介绍：N：普通不锈钢工作台；V：真空吸气式工作台；H：立式

Model introduction: N: ordinary stainless steel worktable; V: vacuum suction type worktable; H: vertical type



应用范围/Scope of Application

适用于各种平面材料，应用范围广，如海报印刷、标识制作、T 恤印花、纸盒印刷、陶瓷工艺品印刷等。

It is suitable for all kinds of flat materials and has a wide range of applications, such as poster printing, logo making, T-shirt printing, carton printing, ceramic handicrafts printing, etc.

半自动平面丝印机

Semi-Automatic Flat Screen Printing Machine

该款丝印机，做工精细，实用性强，性价比高；微电脑控制系统，自动化程度高，操作简单，容易上手。精磨高强度工作台，均布吸气孔，强力真空吸附，保证多色套色准确；印刷行程和速度可调，能满足不同的印刷要求。

The screen printing machine, fine workmanship, practicality, cost-effective; microcomputer control system, high degree of automation, simple operation, easy to get started. Precision grinding and high hardness worktable, evenly distributed suction holes, strong vacuum adsorption, to ensure the accuracy of multi-color register; printing stroke and speed adjustable, can meet different printing requirements.



3050N/V

型号 Model	3050N	3050NV
台面尺寸(mm) Countertop Size	300*500	300*500
台面特点 Countertop Features	无吸气 no vacuum	吸气 vacuum
最大印刷面积(mm) Max. printing area	250*350	250*350
最大印刷高度(mm) Max. print height	80	80
气压(bar) Pressure	5-6	5-6
印刷速度(次/时) Printing speed (Pcs/h)	1200	1200
驱动方式 Driving method	气动 Pneumatic	气动 Pneumatic
产品尺寸(mm) Product Size	750*650*850	750*650*850
重量(kg) Product weight	90	90

型号介绍：N：普通不锈钢工作台；V：真空吸气式工作台
Model introduction: N: ordinary stainless steel worktable; V: vacuum suction type worktable

应用范围/Scope of Application

平面丝印台广泛应用于广告、纺织印染、工业、陶瓷、塑料制品等行业。适合印制PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、薄膜开关电路、手机镜片、玻璃、液晶显示板，标牌，PVC片材，花纸等平面型材质。

Flat screen printing table is widely used in advertising, textile printing and dyeing, industry, ceramics, plastic products and other industries. It is suitable for printing PCB, silicone, textile, plastic button, PET cardboard, nameplate, trademark, IC board, membrane switch circuit, cell phone lens, glass, LCD board, signage, PVC sheet, floral paper and other flat type materials.



70100MM/V

半自动平面丝印机

Semi-Automatic Flat Screen Printing Machine



5070MM/V/T



7090MM/V

6080MM与7090MM款式相同
6080MM & 7090MM Same Appearance


型号 Model	5070MM	5070MMV	5070MMT	6080MM	6080MMV	7090MM	7090MMV	70100MM	70100MMV
台面尺寸(mm) Countertop Size	500*700	500*700	500*700	600*800	600*800	700*900	700*900	700*1000	700*1000
台面特点 Countertop Features	无吸气 no vacuum	吸气 vacuum	T型工作台 T-worktop	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum	吸气 no vacuum	吸气 vacuum
最大印刷面积(mm) Max. printing area	450*650	450*650	450*650	500*700	500*700	600*800	600*800	600*900	600*900
最大印刷高度(mm) Max. print height	80	80	80	80	80	80	80	80	80
印刷速度(次/时) Printing speed (Pcs/h)	1200	1200	1200	1200	1200	1200	1200	1200	1200
气压(bar) Pressure	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
产品尺寸(mm) Product Size	1220*1020 *1750	1220*1020 *1750	1220*1020 *1750	1220*1020 *1750	1220*1020 *1750	1520*1230 *1750	1520*1230 *1750	1520*1180 *1750	1520*1180 *1750
重量(kg) Product weight	350	350	350	400	400	500	500	420	420
上下左右驱动方式 Up/down, left/right Driving method	电动 Electric	电动 Electric	电动 Electric	电动 Electric	电动 Electric	电动 Electric	电动 Electric	电动 Electric	电动 Electric
印头驱动方式 Printhead Drive Type	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic

气动小型平面丝印机

Pneumatic Compact Flat Screen Printing Machine

气动平面丝印机，通过气动元件控制网版的上下运动。在印刷过程中，网版能够按照预设的程序自动与承印物接触和分离，提高了印刷的效率和准确性。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

Pneumatic flat screen printing machine, the up and down movement of the screen plate is controlled by pneumatic components. During the printing process, the screen plate can automatically contact and separate from the substrate according to the preset program, which improves the efficiency and accuracy of printing. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.

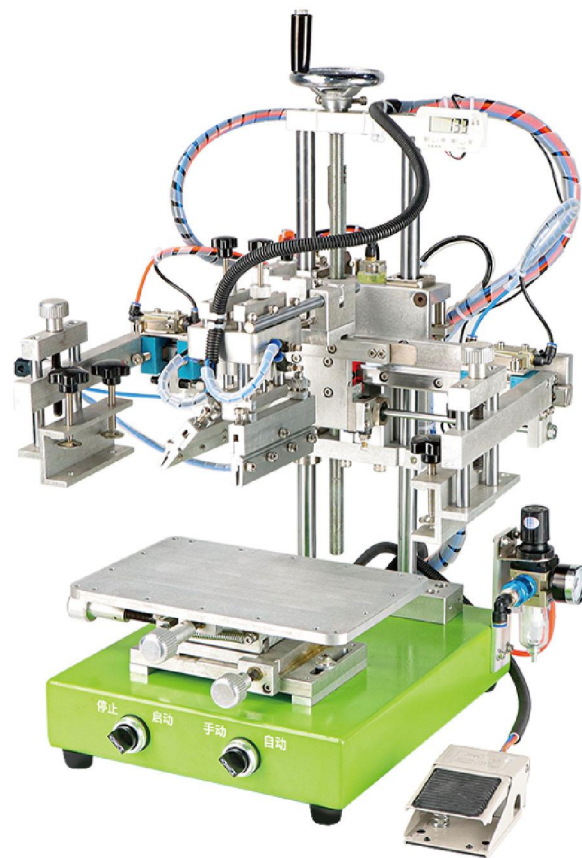

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	印刷高度(mm) Printing height	最大网版尺寸(mm) Max. Screen Size	最大印刷面积(mm) Max. Print Area	产品重量(kg) Product weight	产品尺寸(mm) Product Size	气压(bar) Pressure
D709	200*300	120	300*450	180*250	32	500*600*650	5.5

应用范围/Scope of Application

广泛应用于广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业。利用其印刷速度调节方便的特点，可以快速完成大量的印刷任务。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。

Widely used in advertising industry, electronics industry, packaging industry, textile industry, glass and ceramics industry. Utilizing its easy adjustment of printing speed, it can quickly complete a large number of printing tasks. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the aesthetics.

台式平面半自动丝印机

Tabletop Flat Semiautomatic Screen Printing Machine

该款气动平面丝印机，可选真空工作台面，真空工作台面吸气功能通过产生负压，将印刷品紧紧吸附在工作台上，从而有效地防止印刷品在印刷过程中的移位和变形，确保印刷精度。通过气动元件控制。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

This pneumatic flat screen printing machine, optional vacuum worktable, vacuum worktable suction function by generating negative pressure, the prints will be tightly adsorbed on the worktable, so as to effectively prevent the prints from shifting and deformation during the printing process, to ensure the printing accuracy. Controlled by pneumatic components. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.



3050



4060

参数/Parameters

型号 Model	3050	4060	型号 Model	3050	4060
台面 Countertop	实心铸铝台面 Solid Cast Aluminum Countertop	不锈钢台面 Stainless Steel Countertop	印刷速度(次/时) Printing speed (Pcs/h)	1200	1200
台面特点 Countertop Features	吸气/无吸气 Vacuum/no vacuum	吸气/无吸气 Vacuum/no vacuum	网版尺寸(mm) Screen size	400*650	500*750
最大印刷面积(mm) Max. printing area	250*350	350*500	工作台面积(mm) Worktop area	300*500	400*600
最大印刷高度(mm) Max. print height	100	100	产品尺寸(mm) Product Size	750*620*1100	850*750*1100
左右行程(mm) Left Right Itinerary	400	500	产品重量(kg) Product weight	90	100
上下行程(mm) Up down Itinerary	125	125	气压(bar) Pressure	5-7	5-7

应用范围/Scope of Application

广泛应用于各大行业，例如广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业等。能够很好地还原设计稿中的色彩。其印刷速度调节方便的特点，可以快速完成大量的印刷任务。能满足不同的印刷要求。


It is widely used in major industries, such as advertising, electronics, packaging, textile, glass and ceramics. It is able to restore the colors in the design manuscript very well. Its printing speed is easy to adjust the characteristics, can quickly complete a large number of printing tasks. It can meet different printing requirements.

立式平面半自动丝印机


Vertical Flat Semi-automatic Screen Printing Machine

该款气动平面丝印机，可选真空工作台面，真空工作台面吸气功能通过产生负压，将印刷品紧紧吸附在工作台上，从而有效地防止印刷品在印刷过程中的移位和变形，确保印刷精度。通过气动元件控制。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

This pneumatic flat screen printing machine, optional vacuum worktable, vacuum worktable suction function by generating negative pressure, the prints will be tightly adsorbed on the worktable, so as to effectively prevent the prints from shifting and deformation during the printing process, to ensure the printing accuracy. Controlled by pneumatic components. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.

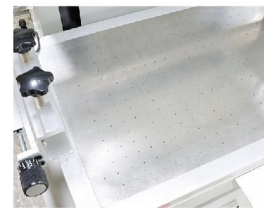

吸气工作台面
Vacuum Worktop



无吸气工作台面
No Vacuum Worktop

参数/Parameters

型号 Model	3050	4060	型号 Model	3050	4060
台面 Countertop	实心铸铝台面 Solid Cast Aluminum Countertop	不锈钢台面 Stainless Steel Countertop	印刷速度(次/时) Printing speed (Pcs/h)	1200	1200
台面特点 Countertop Features	吸气/无吸气 Vacuum/no vacuum	吸气/无吸气 Vacuum/no vacuum	网版尺寸(mm) Screen size	400*650	500*750
最大印刷面积(mm) Max. printing area	250*350	350*500	工作台面积(mm) Worktop area	300*500	400*600
最大印刷高度(mm) Max. print height	100	100	产品尺寸(mm) Product Size	750*620*1550	850*750*1550
左右行程(mm) Left Right Itinerary	400	500	产品重量(kg) Product weight	110	130
上下行程(mm) Up down Itinerary	125	125	气压(bar) Pressure	5-7	5-7

应用范围/Scope of Application

广泛应用于各大行业，例如广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业等。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。其印刷速度调节方便的特点，能满足不同的印刷要求。

It is widely used in major industries, such as advertising, electronics, packaging, textile, glass and ceramics. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the aesthetics. Its easy adjustment of printing speed can meet different printing requirements.

小型摇臂式半自动丝印机

Compact Rocker Type Semi-Automatic Screen Printing Machine

整体体积较小、重量较轻，易于搬运和安置，适合在空间有限的场所使用。极简式机械结构，操作简单，调节方便，易于上手，降低了人工成本和培训成本。由于其小型化和摇臂结构的特点，设备能够适应不同形状、尺寸和材质的平面承印物，通过调整夹具和网版的位置，可以轻松实现多种产品的印刷，提高了设备的通用性和利用率。

Smaller overall volume and lighter weight, easy to carry and place, suitable for use in places with limited space. The minimalist mechanical structure is simple to operate, easy to adjust and easy to start, reducing labor and training costs. Due to its miniaturization and rocker arm structure, the equipment is able to adapt to flat substrates of different shapes, sizes and materials. By adjusting the position of the fixture and screen, it is easy to print a variety of products, which improves the versatility and utilization of the equipment.

参数/Parameters

型号 Model	D710
台面尺寸(mm) Countertop Size	120*200
最大网版尺寸(mm) Max. Screen Size	300*400
产品尺寸(mm) Product Size	740*600*280
产品重量(kg) Product Weight	35
印刷面积(mm) Printing Area	150*200
气压(bar) Pressure	4-6
包装尺寸(mm) Package Size	300*700*700
最大可夹网版厚度(mm) Max. Screen Thickness	50



应用范围/Scope of Application

广泛应用于广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业。利用其印刷速度调节方便的特点，可以快速完成大量的印刷任务。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。

Widely used in advertising industry, electronics industry, packaging industry, textile industry, glass and ceramics industry. Utilizing its easy adjustment of printing speed, it can quickly complete a large number of printing tasks. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the aesthetics.



全自动圆盘丝印机


Automatic Disc Screen Printing Machine

全钢架底座，稳定坚固耐用。全自动印刷，提高生产效率。每个颜色可单独打印。可自动调节印刷高度，定位机构设计合理，套位精准。（1080自带两个烘干机）

Full steel frame base, stable and sturdy. Fully automatic printing to improve productivity. Each color can be printed separately. Printing height can be adjusted automatically, the positioning mechanism is well designed, and the register is accurate. (1080 comes with two dryers)



DL1080

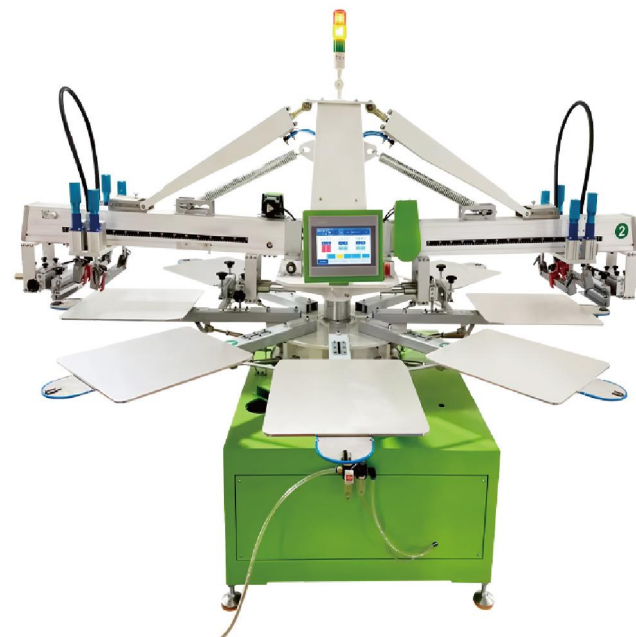

DL2080

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	产品直径(mm) Machine diameter	功率(kw) Power	产品重量(kg) Product weight	气压规格(Mpa) Air pressure specifications
DL1080	230*250	1色/8工位 1Color/8Station	300*400	1980	2.1	380	0.6
DL2080	450*600	2色/8工位 2Color/8Station	500*700	2700	1.2	880	0.6

应用范围/Scope of Application

常用于 T 恤、卫衣、等各类服装的图案印刷，或是床单、被罩、窗帘等家纺产品的印花，能为家纺产品增添丰富精美的图案。在皮革制品上印制各种花纹、商标等。

Commonly used in T-shirts, sweatshirts, and other types of clothing pattern printing, or sheets, covers, curtains and other home textile products, printing, home textile products can add rich and exquisite patterns. Printing various patterns and trademarks on leather products.

气球丝印机

Balloon Screen Printing Machine

气球丝印机是一种专门用在气球表面印刷图案、文字或标志的设备。生产速度快，能够满足大批量生产的需求，提高生产效率，降低生产成本。操作简单易懂，工人经过简单培训即可熟练操作，减少了人工操作的难度和劳动强度。

Balloon screen printing machine is a kind of equipment specially used to print patterns, words or logos on the surface of balloons. The production speed is fast, which can meet the demand of mass production, improve the production efficiency and reduce the production cost. The operation is simple and easy to understand, workers can be skilled after simple training, reducing the difficulty of manual operation and labor intensity.



型号 Model	DL001
产品重量(kg) Product weight	80
产品尺寸(mm) Product size	1090*590*1390
打印台尺寸(mm) Printing table size	200*200
最大打印面积(mm) Max. printing area	150*150
最快打印速度(Pcs/h) Fastest printing speed	1500
电压(v) Voltage	220
功率(w) Power	100
印刷行程(mm) Printing trips	240
最大屏幕尺寸(mm) Max. Screen Size	400*300
网版厚度范围(mm) Screen thickness range	20~30
网版微调范围(mm) Stencil fine-tuning range	±10

应用范围/Scope of Application

应用广泛，可以在各种材质的气球上进行印刷，如乳胶气球、橡胶气球、铝膜气球等，还可以印刷不同形状和尺寸的气球，如圆形、心形、椭圆形等。

Widely used, it can be printed on balloons made of various materials, such as latex balloons, rubber balloons, aluminum film balloons, etc. It can also be printed on balloons of different shapes and sizes, such as round, heart, oval and so on.

旋 钮式半自动丝印机

Knob Type Semi-automatic Screen Printing Machine

小型平面丝印机，小幅面积丝网印刷机，外形小巧，运行速度快，性能稳定，广泛应用于电子、五金、塑胶、镜片、玻璃、玩具、办公及学习文具用品、PVC胶片，纸张，PVC化妆品、等等产品表面商标印刷。

Small plane screen printing machine, small area screen printing machine, small appearance, fast running speed, stable performance, widely used in electronics, hardware, plastic, lenses, glass, toys, office and learning stationery, PVC film, paper, PVC cosmetics, and so on the surface of the product trademark printing.



D711

参数/Parameters


型号 Model	D711
台面尺寸(mm) Worktop Size	上层台面/upper worktop: 200*80 底层台面/demersal worktop: 200*200
丝印面积(mm) Screen Printing Area	120*160
最大网版尺寸(mm) Max. Screen Size	300*400
产品尺寸(mm) Product Size	750*450*680
产品重量(kg) Product Weight	40
驱动方式 Driving Method	气动 Pneumatic

气 动圆瓶丝印机

Pneumatic Round Bottle Screen Printing Machine

参数/Parameters

型号 Model	S100
网版尺寸(mm) Screen Size	250*400
印刷行程(mm) Printing Trips	130
圆瓶直径(mm) Round Bottle Diameter	10-100
气压(bar) Pressure	5.5
产品尺寸(mm) Product Size	450*500*650
产品重量(kg) Product Weight	34

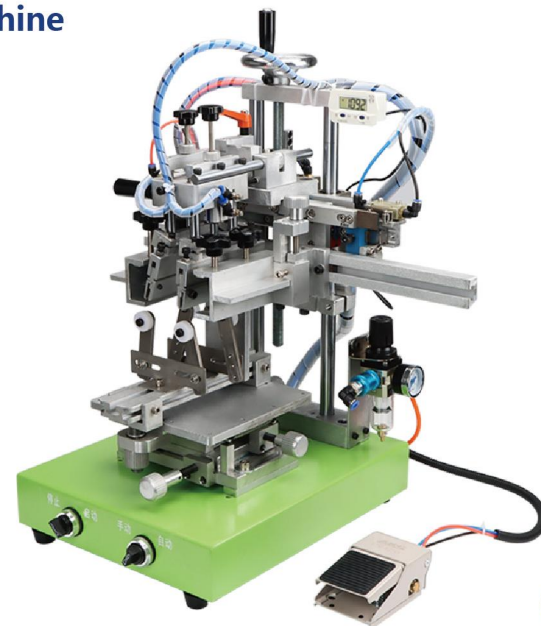

S100

应用范围/Scope of Application

可用于印刷口红管、唇彩瓶、睫毛膏瓶等彩妆产品的瓶身。或是果汁、汽水等玻璃瓶装饮料瓶的瓶身。药品包装瓶等圆柱形物体的印刷。

It can be used to print lipstick tubes, lip gloss bottles, mascara bottles and other bottles of makeup products. Or the bottle body of glass bottled beverage bottles such as fruit juice, soft drink, etc. Printing of cylindrical objects such as medicine packaging bottles.

立 式两用丝印机

Vertical Dual-purpose Screen Printing Machine

立式两用丝印机，曲面印刷还可改装成平面印刷。以适应不同的印刷需求。立式结构使机器在印刷过程中更加稳定，能够有效减少震动和晃动，从而提高印刷精度。

Vertical dual-purpose screen printing machine, curved surface printing can also be converted into flat printing. To adapt to different printing needs. Vertical structure makes the machine more stable in the printing process, and can effectively reduce vibration and shaking, thus improving printing accuracy.



400A



300A

参数/Parameters

型号 Model	印刷直径(mm) Printing Diameter	曲面最大印刷面积(mm) Max. print area on round surface	平面最大印刷面积(mm) Max. print area on flat surface	网版最大外径(mm) Max. outer diameter of the screen
300A	80	80*200	200*250	300*500
400A	110	110*200	200*350	300*560
型号 Model	印刷速度(次/时) Printing speed (Pcs/h)	气压(bar) Pressure	产品尺寸(mm) Product size	产品重量(kg) Product weight
300A	1200	4-5	750*850*1250	120
400A	1200	4-5	850*850*1250	140

应用范围/Scope of Application

两用丝印机，广泛应用于唇膏外壳、睫毛膏管、化妆水瓶、饮料瓶、保温杯、塑料杯、奶瓶、礼品盒、礼品袋等的曲面部分印刷或是T恤、玻璃、等平面产品的表面印刷。

Dual-purpose screen printing machine, widely used in lipstick shell, mascara tube, cosmetic bottles, beverage bottles, thermos cups, plastic cups, milk bottles, gift boxes, gift bags, etc. curved surface part of the printing or T-shirt, glass, and other flat products surface printing.

流水线丝印机

Flow Line Screen Printing Machine

平面流水线一体印刷机采用步进电机精准输送定位；自动印刷；自动出料为一体，可加装隧道炉；省时、省力、易用、高效率、高精度；不仅生产效率会大大提高，而且减少人工成本。

Plane assembly line all-in-one printing machine adopts stepping motor precise conveying and positioning; automatic printing; automatic discharging as a whole, can be added with tunnel furnace; time-saving, labor-saving, easy to use, high efficiency, high precision; not only the production efficiency will be greatly improved, but also to reduce the cost of labor.



4060LN



4060LV
真空吸气工作台
Vacuum adsorption worktop



4060PCV
真空吸气工作台
Vacuum adsorption worktop

参数/Parameters

型号 Model	4060LN	4060LV	4060PCV
产品尺寸(cm) Product Size	2600*1140*1750	2720*1030*1600	2720*1030*1600
流水线皮带尺寸(mm) Line Belt Size	2500*600	2500*600	2500*600
最大打印尺寸(mm) Max.printing size	350*550	350*550	350*550
最大框架尺寸(mm) Max.Framen Size	500*800	500*800	500*800
重复套印精度(mm) Repeat Accuracy	±0.08	±0.08	±0.08
打印厚度(mm) Printing Thickness	80	80	80
打印速度(Pcs/h) Printing Speed	800-1200	800-1200	800-1200
上下驱动模式 Up And Down Drive Mode	Pneumatics	Pneumatics	Pneumatics
左右驱动模式 Laft And Right Drive Mode	Pneumatics	Electric Powered	Electric Powered
重量(kg) Product Weight	180	180	680
气压(Bar) Air Preeure	5-6	5-6	5-6
功率(W) Power	40	40	6000
电压(V) Voltage	AC220	AC220	AC380

应用范围/Scope of Application

广泛应用于电子电器行业、塑料五金行业、服装纺织行业、包装行业等。工作台带有真空吸附功能，能印刷塑料袋等轻薄的产品。还可增加隧道炉，可印刷后一体式快速烘干。

Widely used in electronic and electrical appliances industry, plastic hardware industry, clothing and textile industry, packaging industry and so on. The working table with vacuum adsorption function can print light and thin products such as plastic bags. Can also add tunnel oven, can be printed after the one-piece rapid drying.

大型斜臂式丝印机

Large Inclined Arm Screen Printing Machine


大型斜臂丝印机，斜臂设计使得丝网版与承印物之间的距离调节更加灵活方便。吸气装置将承印物牢牢吸附固定，确保印刷过程中承印物不会发生位移，保证印刷精度。

Large slanting arm screen printing machine, slanting arm design makes it more flexible and convenient to adjust the distance between the screen plate and the substrate. The suction device adsorbs and fixes the substrate firmly, ensuring that the substrate will not be displaced during the printing process and guaranteeing printing accuracy.



参数/Parameters

型号 Model	DL-6090
产品尺寸(cm) Product size	150*120*125
工作台面尺寸(cm) Worktop size	72*100
最大打印尺寸(cm) MAX. PRINT SIZE	60*90
网版上升高度(cm) Screen Rise Height	30
产品重量(kg) Weights	410
最大网版尺寸(cm) Max. Screen Size	90*120
最小网版尺寸(cm) Min. Screen Size	45*55
打印速度(Pcs/h) Speed	500-1200
功率(Kw) Power	2.3

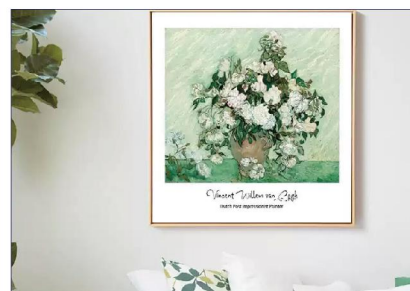

应用范围/Scope of Application

广泛应用于烟、酒、茶、药、化妆品等各类产品的包装盒印刷。也可用于印刷各种海报、宣传画、广告牌、挂历、年画等广告宣传材料。还用于在纺织品上印刷各种图案、花纹和文字，如T恤、卫衣、背包等。

Widely used in the printing of packaging boxes for all kinds of products such as cigarettes, wine, tea, medicine, cosmetics and so on. It can also be used for printing all kinds of posters, posters, billboards, calendars, yearbooks and other advertising and promotional materials. It is also used for printing all kinds of designs, patterns and words on textiles, such as T-shirts, sweatshirts, backpacks and so on.

立式两用丝印机

Vertical Dual-purpose Screen Printing Machine

立式两用丝印机，曲面印刷还可改装成平面印刷。以适应不同的印刷需求。立式结构使机器在印刷过程中更加稳定，能够有效减少震动和晃动，从而提高印刷精度。**每个型号均有两款颜色可选。**

Vertical dual-purpose screen printing machine, curved surface printing can also be converted into flat printing. To adapt to different printing needs. Vertical structure makes the machine more stable in the printing process, and can effectively reduce vibration and shaking, thus improving printing accuracy. **Each model is available in two colors.**



600A



800A

参数/Parameters

型号 Model	印刷直径(mm) Printing Diameter	最大印刷面积(mm) Max. printing area	重复套印精度(mm) Repeat accuracy	网版最大外径(mm) Max. outer diameter of the screen
600A	170	550*300	±0.05	400*720
800A	240	750*300	±0.05	400*1000
型号 Model	印刷速度(次/时) Printing speed (Pcs/h)	气压(bar) Pressure	产品尺寸(mm) Product size	产品重量(kg) Product weight
600A	800	4-5	950*1250*1350	160
800A	1000	4-5	1450*1450*1450	200

应用范围/Scope of Application

两用丝印机，广泛应用于饮用水外壳、棒球杆、化妆水瓶、饮料瓶、保温杯、咖啡杯、奶茶杯、礼品盒、清洗剂瓶等的曲面部分印刷或是T恤、玻璃、等平面产品的表面印刷。

Dual-purpose screen printing machine, widely used in drinking water shells, baseball bats, cosmetic bottles, beverage bottles, thermos cups, coffee cups, milk tea cups, gift boxes, detergent bottles, etc. curved surface part of the printing or T-shirt, glass, and other flat products surface printing.

自动对齐曲面丝印机

Automatic Alignment Surface Screen Printing Machine

自动对齐功能能够确保丝印图案与承印物曲面的位置精确匹配，有效避免了印刷图案的偏移、错位等问题，提高了印刷质量和产品的一致性。在自动对齐完成后，通过刮板挤压油墨，使油墨通过丝网印版的网孔转移到承印物的曲面上，完成印刷过程。

The automatic alignment function ensures that the position of the screen printing pattern and the surface of the substrate are precisely matched, effectively avoiding problems such as offset and misalignment of the printing pattern and improving the printing quality and product consistency. After the automatic alignment is completed, the ink is squeezed by the squeegee, so that the ink is transferred to the surface of the substrate through the mesh of the screen printing plate to complete the printing process.



参数/Parameters

型号 Model	400CF
最大印刷直径(mm) Max. printing diameter	110
最大网框外径尺寸(mm) Max. frame O.D. size	300*500 no vacuum
自动对位功能 Auto-alignment	Yes
重复套印精度(mm) Repeat overprint accuracy	±0.05
电压(V) Voltage	AC220
印刷速度(Pcs/h) Printing speed	600-800
机器尺寸(mm) Product Size	900*950*1700
产品旋转驱动方式 Product rotation drive method	伺服电动 Servo-electric
抬板上下驱动方式 Lift plate up and down drive method	变频电机 Variable Frequency Motors
左右印刷驱动方式 Left and right printing drive method	伺服电动 Servo-electric
重量(kg) Product weight	280
气源压力(mm) Air pressure	5~6
功率(W) Power	3000

应用范围/Scope of Application

应用范围十分广泛，例如化妆品包装：唇膏外壳、化妆品瓶子等，可印制品牌标识、图案、成分说明等。像洗涤剂瓶子、沐浴露瓶子等，能印刷品牌商标等。食品饮料包装：例如饮料瓶、酒瓶、塑料杯、奶茶杯、保温杯等多色印刷。

The range of applications is very wide, such as cosmetic packaging: lipstick shells, cosmetic bottles, etc., which can be printed with brand logos, patterns, and ingredient descriptions. Like detergent bottles, shower gel bottles, etc., can be printed with brand logo, etc. Food and beverage packaging: such as beverage bottles, wine bottles, plastic cups, milk tea cups, insulation cups and other multi-color printing.

全自动曲面丝印机

Automatic Curved Surface Screen Printing Machine

采用先进的定位系统和印刷技术，能够实现高精度的印刷效果，确保图案和文字的清晰、准确。从送料、印刷到收料，整个过程可实现全自动化操作，大大提高了生产效率。

Adopting advanced positioning system and printing technology, it is able to realize high-precision printing effect and ensure clear and accurate patterns and texts. From feeding, printing to receiving, the whole process can realize fully automatic operation, which greatly improves the production efficiency.



参数/Parameters

型号 Model	DL1845 (单色/Monochrome)	DL1846 (多色/Multicolor)
印刷速度(Pcs/h) Printing speed	3600-4800	1800-2400
网框尺寸(mm) Mesh frame size	180*450	180*450
最大印刷直径(mm) Max. printing diameter	110	110
印刷工位 Printing station	8/12	8/12
电压(V) Voltage	AC220	AC220
气压(mpa) Pressure	0.4-0.8	0.4-0.8
机器尺寸(mm) Product Size	1300*1200*1950	1300*1200*1950
含输送线尺寸(mm) Including conveyor line size	3500*2500*1950	3500*2500*1950
功率(W) Power	7kw	7kw
旋转转盘直径(mm) Diameter of rotating turntable	600	600
旋转方式 Rotation scheme	旋转台 Rotating platform	旋转台 Rotating platform

应用范围/Scope of Application

应用广泛，化妆品瓶、药瓶、饮料瓶等各种包装容器的表面印刷。或是塑料杯、奶茶杯、咖啡杯等的表面印刷。也可在玻璃瓶、玻璃杯等玻璃曲面制品上进行印刷，实现装饰和标识的功能。

Widely used, surface printing of various packaging containers such as cosmetic bottles, medicine bottles, beverage bottles, etc. Or surface printing on plastic cups, milk tea cups, coffee cups and so on. It can also be printed on glass curved products such as glass bottles, glass cups, etc. to realize the functions of decoration and marking.

小转盘平面丝印机

Small Turntable Flat Screen Printing Machine

印刷平衡稳，震动小，精度高，可设置手动/半自动/全自动多种模式，印刷动作间接时间可数字控制。整机全套封装，免维护。安全美观，操作简单，取物方便，极大地提高了生产效率。

Printing balance is stable, small vibration, high precision, manual/semi-automatic/full-automatic modes can be set, printing action indirect time can be digitally controlled. The whole machine is fully encapsulated and maintenance free. Safe and beautiful, easy to operate, easy to pick up, greatly improving production efficiency.



参数/Parameters

型号 Model	DLO480R-2
最大印刷面积(mm) Max. printing area	120*250
最大网框外径(mm) Max. frame outer diameter	400*550
工作台尺寸(mm) Worktop size	150*300
重复打印精度(mm) Repeat Printing Accuracy	±0.05
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	50
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	810*1080*1650
上下驱动方式 Up/down drive method	气动 Pneumatic
左右驱动方式 Left/right drive mode	变频电机 Electric powered
产品重量(kg) Product weight	280
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

适合印制PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、薄膜开关电路、手机镜片、玻璃，液晶显示板，标牌，PVC片材，花纸等平面型材质。

Suitable for printing PCB, silicone, textile, plastic keypad, PET cardboard, nameplate, trademark, IC board, membrane switch circuit, cell phone lens, glass. Liquid crystal display board, signage, PVC sheet, flower paper and other flat type materials.

跑台丝印机

Running Table Flat Screen Printing Machine

触摸屏操作系统配合变频器编译动作程序，经久耐用，维护简单；钢结构加铸铝机身，双柱式升降结构，精度高，运行平稳；精磨高强硬度工作台，均布吸气孔，强力真空吸附，保证多色套色准确。

Touch screen operating system with frequency converter compiled action program, durable, simple maintenance; steel structure with cast aluminum body, double-column lifting and lowering structure, high precision, stable operation; precision grinding high hardness worktable, uniformly distributed suction holes, strong vacuum adsorption, to ensure the accuracy of multi-color color registration.



参数/Parameters

型号 Model	DLO4060MMF
最大印刷面积(mm) Max. printing area	300*500
最大网框外径(mm) Max. frame outer diameter	500*800
工作台尺寸(mm) Worktop size	400*600
重复打印精度(mm) Repeat Printing Accuracy	±0.05
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1480*1120*1750
上下驱动方式 Up/down drive method	气动 Pneumatic
左右驱动方式 Left/right drive mode	变频电动 Electric powered
产品重量(kg) Product weight	250
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

应用广泛于平面承印物，适合多品种、如服装纺织类的T恤、帆布包等图案印刷或是大幅面海报、纸箱LOGO及产品信息印刷。也适合工艺品 / 日用品：陶瓷、玻璃、鼠标垫等平面图案定制。

Widely used in flat substrates, suitable for multiple varieties, such as clothing and textile T-shirts, canvas bags and other graphics printing or large format posters, carton LOGO and product information printing. Also suitable for crafts / daily necessities: ceramics, glass, mouse pads and other flat pattern customization.

电 动立式丝印机
Electric Vertical Screen Printing Machine

此款丝印机，做工精细，实用性强，性价比高；微电脑控制系统，自动化程度高，操作简单，综合性微调装置，适应不同的印刷需求。（可选真空台面）

This screen printing machine, fine workmanship, practicality, cost-effective; microcomputer control system, high degree of automation, easy to operate, comprehensive fine-tuning device to adapt to different printing needs.(Optional vacuum worktop)



参数/Parameters

型号 Model	DLO3050HMM
最大印刷面积(mm) Max. printing area	250*350
最大网框外径(mm) Max. frame outer diameter	400*700
工作台尺寸(mm) Worktop size	300*500
重复打印精度(mm) Repeat Printing Accuracy	±0.08
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1000*750*1600
上下驱动方式 Up/down drive method	变频电机 Electric powered
左右驱动方式 Left/right drive mode	变频电机 Electric powered
产品重量(kg) Product weight	250
气压(bar) Pressure	5-6
功率(w) Power	40

应用范围/Scope of Application

广泛应用于，PCB 板、电子元件、半导体封装印刷。LCD/OLED 面板、光学镜片标识。手表零件、医疗器械、金属外壳 LOGO 及纹路。高端礼盒烫金 / 防伪印刷、陶瓷 / 玻璃文创定制。锂电池极片、汽车仪表盘 / 方向盘标识印刷。

Widely used in PCB boards, electronic components, semiconductor package printing, LCD/OLED panels, optical lens marking. Watch parts, medical equipment, metal casing LOGO and texture. High-end gift box hot stamping / anti-counterfeiting printing, ceramics / glass customization. Lithium battery pole piece, automobile dashboard / steering wheel logo printing.

电 动立式丝印机
Electric Vertical Screen Printing Machine

触摸屏操作系统配合变频器编译动作程序，经久耐用，维护简单；双柱式升降结构，精度高，运行平稳；刮刀恒压装置，确保印刷过程中的压力稳定；高精度微调工作台，带自锁装置；工作台面配备急停装置，防止夹伤手。

Touch screen operating system with frequency converter compiled action program, durable, simple maintenance; double-column lifting and lowering structure, high precision, smooth operation; squeegee constant pressure device to ensure stable pressure in the printing process; high-precision micro-adjustable table with self-locking device; working table is equipped with an emergency stop device, to prevent clamping the hand.



参数/Parameters

型号 Model	DLO4060MMV
最大印刷面积(mm) Max. printing area	350*550
最大网框外径(mm) Max. frame outer diameter	500*800
工作台尺寸(mm) Worktop size	400*600
重复打印精度(mm) Repeat Printing Accuracy	±0.08
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1120*950*1700
上下驱动方式 Up/down drive method	变频电动 Electric powered
左右驱动方式 Left/right drive mode	变频电动 Electric powered
产品重量(kg) Product weight	320
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

适合印制PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、服装纺织类的T 恤、帆布包等图案印刷或是大幅面海报、纸箱 LOGO 及产品信息印刷等平面型材质。


Suitable for printing PCB, silicone, textile, plastic keypad, PET cardboard, nameplate, trademark, IC board, clothing and textile T-shirt, canvas bag and other pattern printing or large-size posters, carton LOGO and product information printing and other flat materials.

双工位丝网印刷机

Double Worktop Screen Printing Machine

自动的四位数计数器，统计印刷数量。全铸铝式机身，表面喷粉烤漆，双柱式升降结构，平稳精度高。不锈钢材质工作台，经久耐用，历久弥新。整机运行速度快，平稳，噪音小。

Automatic four-digit counter to count the number of prints. Full cast aluminum type body, surface powder coating and baking varnish, double-column lifting structure, smooth and high precision. Non-show steel worktable, durable and everlasting. The whole machine running fast, smooth, low noise.

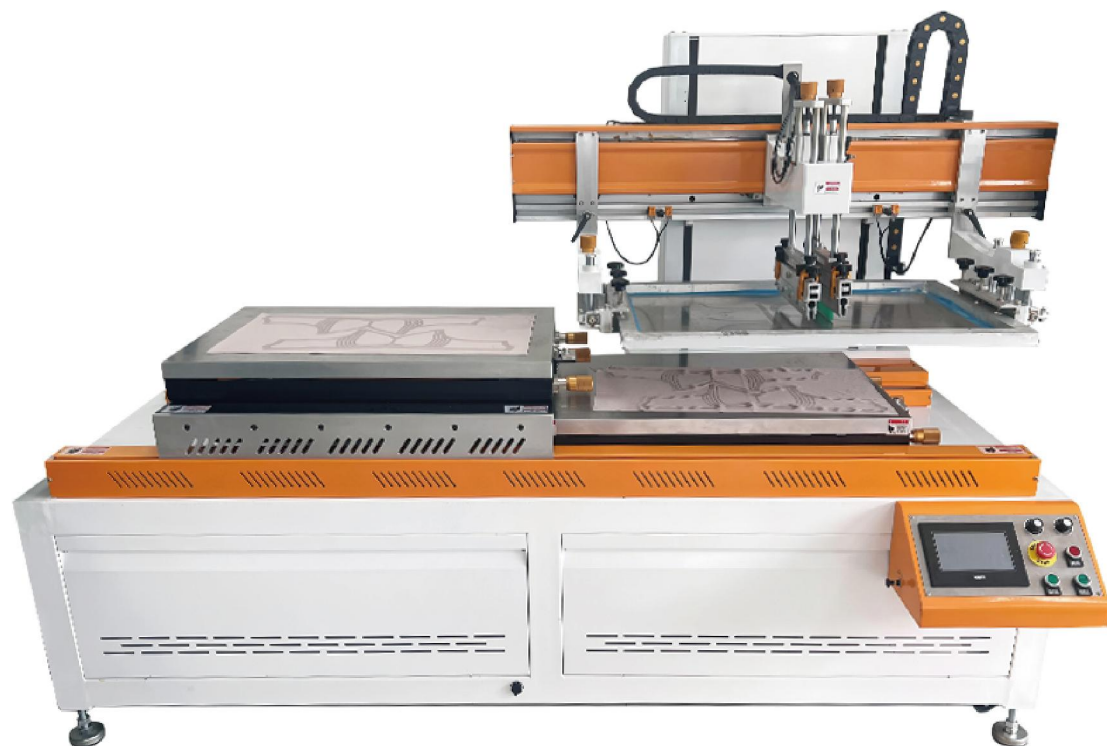

参数/Parameters

型号 Model	DLO70100SMV-2
工作台尺寸(mm) Worktop size	700*1000
产品尺寸(mm) Product size	2520*1320*1610
最大印刷面积(mm) Cartridge capacity	600*900
最大网版尺寸(mm) Information storage	800*1320
印刷高度(mm) Power	80
上下驱动方式 Up/down drive method	电动/electric powered
左右驱动方式 Left/right drive method	电动/electric powered

应用范围/Scope of Application

适合印制服装，包包等帆布材质产品。或是包装制品：纸箱、纸盒、塑料包装袋的品牌LOGO、产品信息、条形码印刷。PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、薄膜开关电路、手机镜片、玻璃、液晶显示板，标牌，PVC片材，花纸等平面型材质。

Suitable for printing clothing, bags and other canvas material products. Or packaging products: carton, carton, plastic bags, brand LOGO, product information, bar code printing, PCB, silicone, textiles, plastic buttons, PET cardboard, nameplate, logo, IC board, membrane switch circuit, cell phone lenses, glass, LCD board, signage, PVC sheet, flower paper and other flat type material.

锡膏丝印台


Solder Paste Screen Printing Station

锡膏丝印台，能够实现高精度的锡膏印刷，适用于不同尺寸和形状的电路板。操作简单，不需要复杂的编程和专业技能，上手即可操作。锡膏丝印台，能够实现高精度的锡膏印刷，适用于不同尺寸和形状的电路板。操作简单，不需要复杂的编程和专业技能，上手即可操作。

Solder Paste Silk Screen Printing Stations, capable of high precision solder paste printing for boards of different sizes and shapes. Simple to operate, no need for complex programming and specialized skills, hands-on operation.



SLO3040

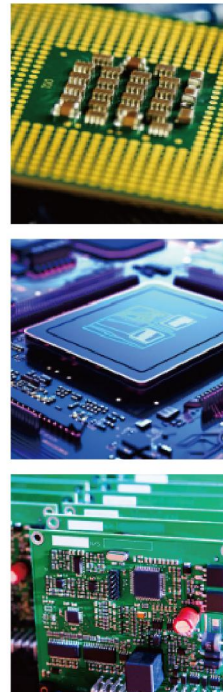

参数/Parameters

型号 Model	DLO2832	DLO3040
台面尺寸 Worktop Size	280*320mm	300*400mm
最大可夹网版厚度 Max. Screen Thickness	40mm	40mm
网版夹子最大升降高度 Max. Screen Lifting Height	140mm	140mm
外观尺寸 Machine Size	400*400*320mm	375*550*430mm
产品重量 Product weight	9.24kg	19.9kg

应用范围/Scope of Application

广泛应用于电子制造行业，如电子产品、汽车电子、通信设备、工业控制设备等电路板上的锡膏印刷。

Widely used in electronic manufacturing industry, such as electronic products, automotive electronics, communication equipment, industrial control equipment and other circuit boards on the solder paste printing.



SLO2832

平面手动丝印台

Flat Manual Screen Printing Table

平面丝印台有较为稳定的结构，能够准确地还原图案和文字的形状，确保印刷质量。无论是纸张、织物、塑料、陶瓷还是金属等平面材料都能进行印刷。平面丝印台设备简单，主要由工作台、丝网版固定装置、刮刀等部分组成。操作方便。

Flat screen printing table has a more stable structure, which can accurately restore the shape of the pattern and text to ensure the printing quality. Whether it is paper, fabric, plastic, ceramic or metal and other flat materials can be printed. Plane screen printing table equipment is simple, mainly by the worktable, screen plate fixtures, squeegees and other parts. Easy to operate.



加厚款/Thicken model
中号/M

参数/Parameters

型号 Model	贴片款 Membrane model			铸铝款 Cast aluminum model			加厚款 Thicken model		
	小号 Small	中号 Middle	大号 Large	小号 Small	中号 Middle	大号 Large	小号 Small	中号 Middle	大号 Large
台面尺寸(mm) Worktop Size	300*240	440*315	590*440	300*240	405*310	590*440	300*240	405*310	590*440
最大可夹网版厚度(mm) Max. Screen Thickness	40	40	40	40	40	40	40	40	40
网版夹子最大升降高度(mm) Max. Screen Lifting Height	140	140	140	140	140	140	140	140	140
外观尺寸(mm) Machine Size	400*400*320	540*475*320	725*600*320	400*400*320	540*475*320	720*600*320	400*400*320	530*475*320	720*600*320
产品重量(kg) Product weight	6.6	9.06	13.48	6.18	8.66	13.66	7.06	10	15.6
包装尺寸(mm) Package Size	530*475*200	640*550*200	810*660*200	530*475*200	640*550*200	810*660*200	530*475*200	640*550*200	810*660*200



加厚款/Thicken model
小号/S



加厚款/Thicken model
大号/L



铸铝款/Cast aluminum model
中号/M


铸铝款/Cast aluminum model
大号/L




铸铝款/Cast aluminum model
小号/S




贴片款/Membrane model
中号/M

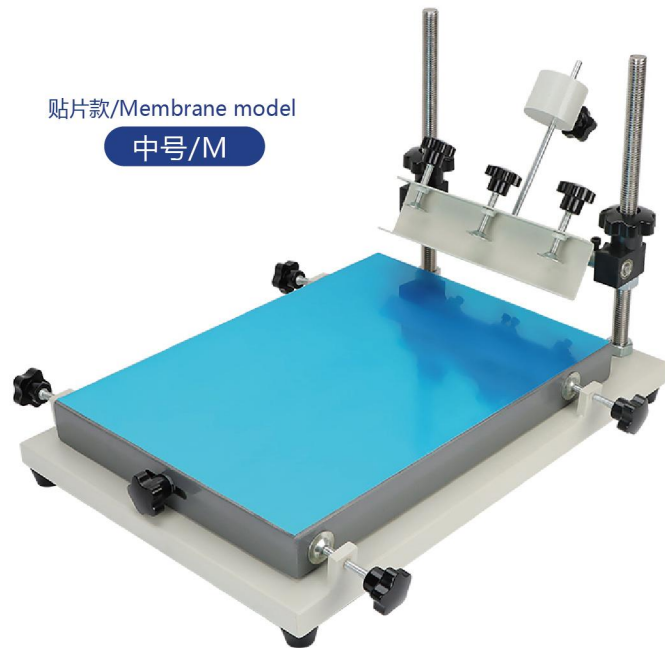

贴片款/Membrane model
大号/L

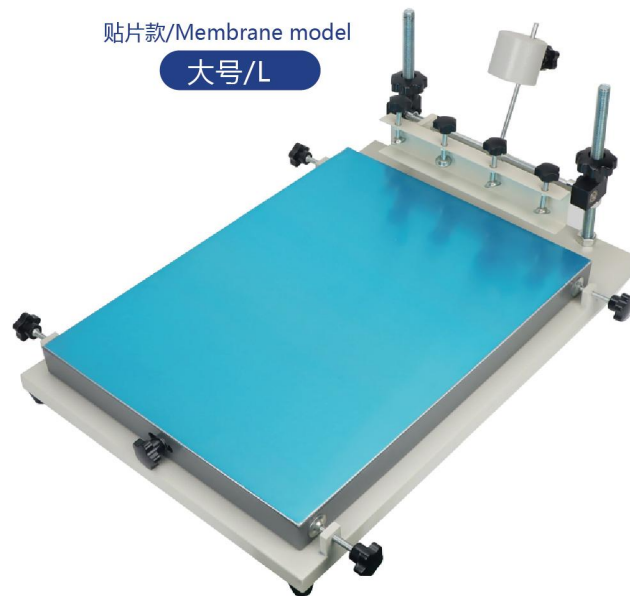

贴片款/Membrane model
小号/S

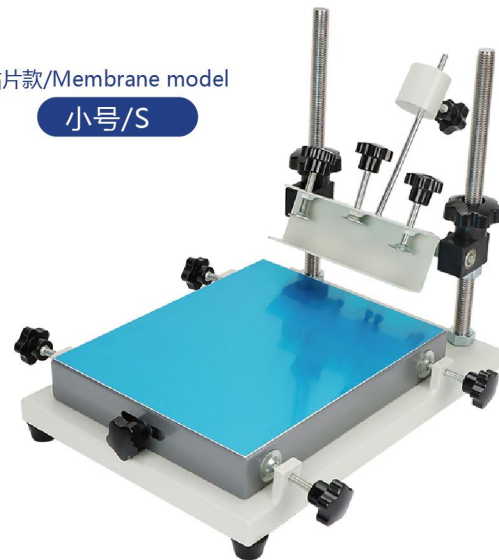

应用范围/Scope of Application

平面丝印台广泛应用于广告、纺织印染、工业、陶瓷、塑料制品等行业。通过平面丝印可以在产品上添加精美的花纹和图案，提升产品的美观度和装饰性。

Flat screen printing table is widely used in advertising, textile printing and dyeing, industry, ceramics, plastic products and other industries. Through flat screen printing you can add exquisite patterns and designs on the products to enhance the beauty and decoration of the products.


高精密手动丝印台 High Precision Manual Screen Printing Table

高精密手动丝印台配备了高精度的定位装置，通常采用精密的夹具或定位销。其整体结构采用高强度的金属材料。操作简单易上手。

High-precision manual screen printing tables are equipped with high-precision positioning devices, usually using precision clamps or positioning pins. Its overall structure is made of high-strength metal materials. The operation is simple and easy to get started.




中号2430/M



型号 Model	印刷高度(mm) Printing Height	台面尺寸(mm) Worktop Size	最大可夹网版厚度(mm) Max. Screen Thickness	网版夹具最大升降高度(mm) Max. Screen Lifting Height	外观尺寸(mm) Machine Size
小号2020 Small	130	200*200	50	130	300*400*350
	230	200*200	50	230	300*400*450
中号2430 Middle	230	240*300	50	230	320*500*450
	360	240*300	50	360	320*500*600
	480	240*300	50	480	320*500*750
大号3040 Large	230	400*300	50	230	500*320*450
	360	400*300	50	360	500*320*600
	480	400*300	50	480	500*320*600
	780	400*300	50	780	500*320*1050
特大号4050 Extra Large	360	400*500	50	360	400*600*600
	480	400*500	50	480	400*600*750
	780	400*500	50	780	400*600*1050

高精密手动丝印台

High Precision Manual Screen Printing Table

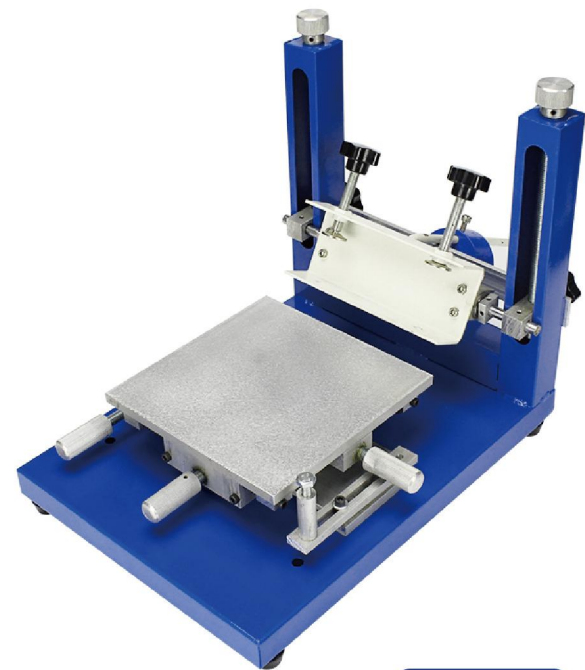

小号2020/S




大号3040/L



特大号4050/XL

该高度为印刷最大高度
This height is the maximum print height

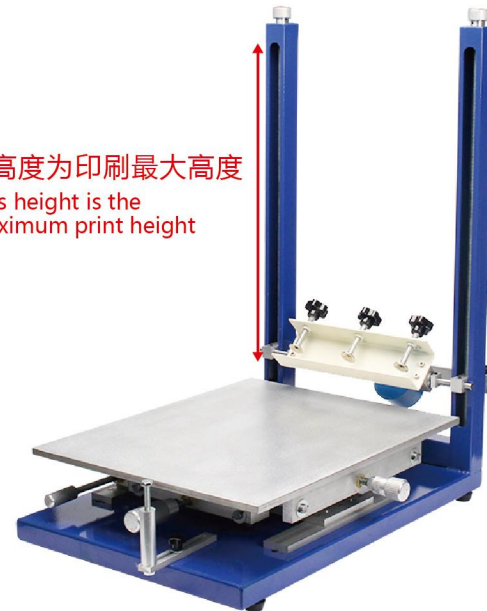

应用范围/Scope of Application

高精密手动丝印台可以用于印刷 PCB 上的电路图案、元件标识等电子行业。也可以用于各种标识logo和铭牌等广告宣传印刷。能够精确控制印刷位置和质量。这种灵活性使得它在不同的印刷场景中都能发挥作用。

High precision manual screen printing table can be used for printing circuit patterns on PCB, component marking and other electronics industry. It can also be used for advertising and promotional printing such as various logos and nameplates. It is able to precisely control the printing position and quality. This flexibility makes it useful in different printing scenarios.

立式高精密吸气丝印台

Vertical High Precision Vacuum Screen Printing Table

吸气功能通过产生负压，将印刷品紧紧吸附在工作台上，从而有效地防止印刷品在印刷过程中的移位和变形，确保印刷精度。广泛适用于纸张、薄膜、水转印花纸、服装印花、陶瓷印花、标版丝印等行业。

The suction function adsorbs the prints tightly on the working table by generating negative pressure, thus effectively preventing the prints from shifting and deforming during the printing process and ensuring the printing accuracy. Widely used in paper, film, water transfer printing flower paper, clothing printing, ceramic printing, labeling screen printing and other industries.



玻璃台面带吸气
Glass countertop with vacuum




不锈钢台面带吸气
Stainless steel countertop with vacuum

型号 Model	台面尺寸(cm) Countertop Size	最大可夹网版厚度(cm) Max. clampable screen thickness	网版夹最大升高高度(cm) Max. lifting height of screen clamps	外观尺寸(cm) Product Size	产品重量(kg) Product Weight	包装尺寸(cm) Package Size
玻璃台面不带吸气 带led灯 Glass countertop without vacuum with LED Light	50*60	5	6	57*87*79	35	90*63*84
	60*70	5	6	67*97*79	42	100*73*84
	60*80	5	6	67*107*79	45	110*73*84
	70*80	5	6	77*107*79	55	110*83*84
玻璃台面带吸气 Glass countertop with vacuum with LED Light	50*60	5	6	57*87*79	40	90*63*84
	60*70	5	6	67*97*79	48	100*73*84
	60*80	5	6	67*107*79	55	110*73*84
	70*80	5	6	77*107*79	60	110*83*84
不锈钢台面不带吸气 Stainless steel countertop without vacuum	50*60	5	9	57*87*75	32	90*63*80
	60*70	5	9	67*97*75	40	100*73*80
	60*80	5	9	67*107*75	42	110*73*80
	70*80	5	9	77*107*75	50	110*83*80
不锈钢台面带吸气 Stainless steel countertop with vacuum	50*60	5	9	57*87*75	38	90*63*80
	60*70	5	9	67*97*75	45	100*73*80
	60*80	5	9	67*107*75	48	110*73*80
	70*80	5	9	77*107*75	55	110*83*80

帽子丝印机

Hat Screen Printing Machine

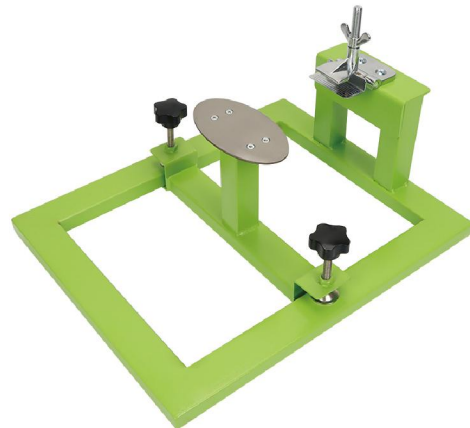

参数/Parameters


型号 Model	B0730
台面尺寸 Worktop Size	130*70mm
外观尺寸 Machine Size	320*405*150mm

帽子手动丝印机，帽子专用的丝印台，用于各种鸭舌帽，渔夫帽等印刷。操作简单易上手，印刷轻松。轻巧的机身，方便移动和放置。

Manual screen printing machine for hats, special screen printing table for hats, used for all kinds of duck-tongue hats, fisherman's hats and other printing. The operation is simple and easy to get started, printing easily. Lightweight body, easy to move and place.

手动曲面丝印机

Manual Curved Screen Printing Machine

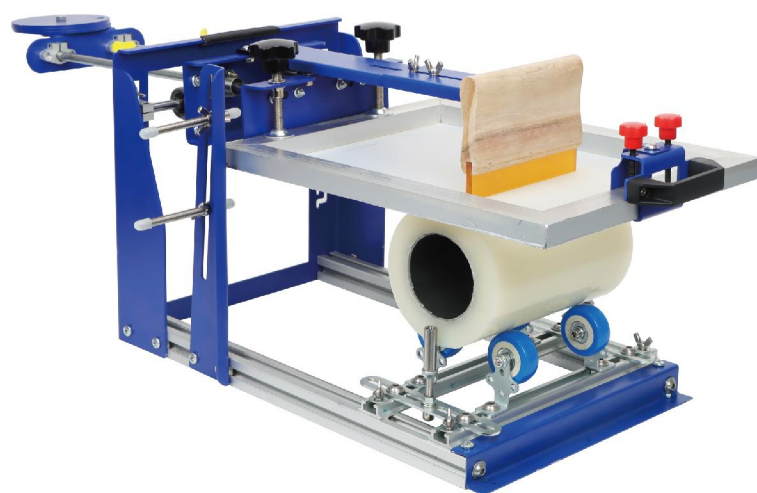

参数/Parameters

Model	B级QMH170 Class B QMH170
最大网版尺寸 Max. Screen Size	280*450mm
最大可夹网版厚度 Max. Screen Thickness	40mm
适用产品直径 Applicable product diameter	170mm
最大图文面积 Max. graphic area	200*250mm
产品重量 Product weight	16kg
产品尺寸 Machine Size	650*320*320mm
最大印刷高度 Max. print height	140mm
最大圆弧面长度 Max. circular surface length	160mm

应用范围/Scope of Application

适用于在各种曲面物体上进行印刷，如圆柱形、圆锥形、弧面形等物体的表面，可广泛应用于化妆品瓶、保温杯、小型电子产品外壳等多种产品的印刷。

It is suitable for printing on all kinds of curved objects, such as the surface of cylindrical, conical and curved objects, and can be widely used in the printing of many products, such as cosmetic bottles, heat preservation cups, and the shells of small electronic products.

曲面丝印机E级小型

Curved Screen Printing Machine E Compact


整体体积较小、重量较轻，易于搬运和安置，适合在空间有限的场所使用。适用于在各种曲面物体上进行印刷，如圆柱形、圆锥形、弧面形等物体的表面。可精确调整承印物与网版之间的相对位置，确保印刷图案的准确性和清晰度，提高印刷精度，满足精密印刷的要求。

Smaller overall size and lighter weight, easy to carry and place, suitable for use in places with limited space. It is suitable for printing on various curved objects, such as the surface of cylindrical, conical and curved objects. It can accurately adjust the relative position between the substrate and the screen plate to ensure the accuracy and clarity of the printing pattern, improve the printing accuracy and meet the requirements of precision printing.



参数/Parameters

型号 Model	曲面丝印机E级小型 Curved Screen Printing Machine E Compact
最大网版尺寸 Max. Screen Size	250*300mm
最大可夹网版厚度 Max. Screen Thickness	30mm
适用产品直径 Applicable product diameter	80mm
最大印刷高度 Max. print height	140mm
产品重量 Product weight	24kg
最大圆弧面长度 Max. circular surface length	160mm
包装尺寸 Package Size	570*540*380mm

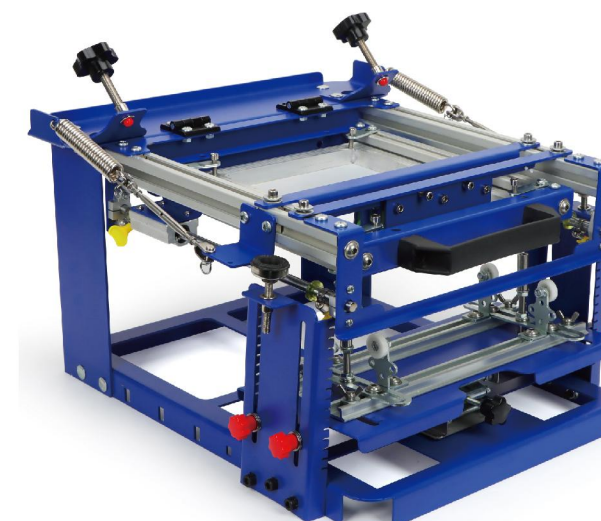

应用范围/Scope of Application

适用于在各种材质的曲面物体上进行印刷，包括塑料、玻璃、金属、陶瓷等常见材料的圆柱形、圆锥形、弧面形等物体的表面。可广泛应用于化妆品瓶、保温杯、小型电子产品外壳等多种产品的印刷。

It is suitable for printing on curved objects made of various materials, including the surfaces of cylindrical, conical, and curved objects made of common materials such as plastic, glass, metal, and ceramics. Can be widely used for printing on a variety of products such as cosmetic bottles, thermos cups, small electronic product shells and so on.

单色手动曲面丝印台

Single Color Manual Curved Screen Printing Table

适用于在各种曲面物体上进行印刷，可广泛应用于药品瓶、圆柱的医疗器械、化妆品瓶、保温杯、小型电子产品外壳等多种产品的印刷。

It is suitable for printing on all kinds of curved objects, and can be widely used in the printing of medicine bottles, cylindrical medical devices, cosmetic bottles, thermal insulation cups, small electronic product shells and many other products.

参数/Parameters

型号 Model	DL0102
最大直径(mm) Max Diameter	160
最大周长(mm) Max Circumference	200
最大打印尺寸(mm) Max Printing size	200*240
最大网版尺寸(mm) Max Screen Size	400*500
包装尺寸(mm) Package Size	680*480*350



DL0102

单色手动丝印台

Single Color Manual Screen Printing Table



参数/Parameters

型号 Model	单色丝印台 Single color manual screen printing table
台面尺寸 Worktop Size	550*450mm
产品重量 Product weight	12kg
包装尺寸 Package Size	670*610*320mm

应用范围/Scope of Application

于印刷海报、宣传单页、名片等广告宣传材料，可实现单色的文字、图案印刷。在包装盒、包装袋等包装材料的印刷中应用广泛。也可在 T 恤、卫衣、毛巾等纺织品上印刷各种图案和文字，实现个性化的设计和定制。

It can be used for printing posters, leaflets, business cards and other advertising materials, and can realize single-color text and pattern printing. It is widely used in the printing of packaging materials such as boxes and bags. It can also be used to print various patterns and words on textiles such as T-shirts, sweatshirts, towels, etc. to achieve personalized design and customization.


多色单工位手动丝印台

Multi-Color One Station Manual Screen Printing Table

对于多色印刷，需通过更换不同颜色的油墨以及精确的套准操作，依次将不同颜色的油墨印刷到承印物的同一位置，形成多色的印刷效果。设备配备了套准装置，常见的有定位销、定位孔系统等。通过这些装置，可确保每次更换颜色进行印刷时，网版与承印物的相对位置准确无误。

For multi-color printing, it is necessary to change different colors of ink and precise register operation, sequentially printing different colors of ink to the same position of the substrate to form a multi-color printing effect. The equipment is equipped with register devices, such as positioning pins and positioning hole systems. These devices ensure that the relative positions of the screen plate and the substrate are

型号 Model	DL0401-S	DL0401-EAS
台面尺寸(mm) Worktop Size	450*540	450*540
颜色/工位 Color/Station	4色/1工位 4Color/1Station	4色/1工位 4Color/1Station
最大框架尺寸(mm) Max.Frame size	500*600	500*600
产品重量(kg) Product weight	26kg	32kg
包装尺寸(mm) Package Size	750*650*310	750*650*310

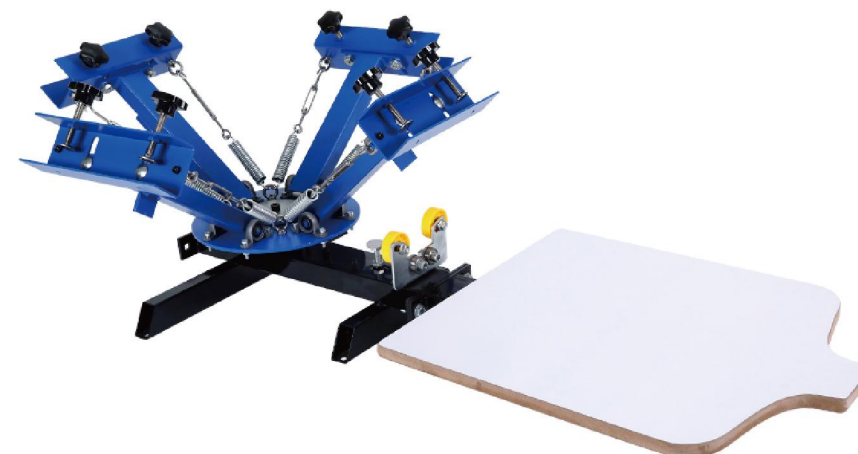

应用范围/Scope of Application

可用于印刷海报、宣传单页、宣传册等广告物料。在包装盒、包装袋等包装材料的印刷中应用广泛。也可在 T 恤、卫衣、毛巾等纺织品上印刷各种图案和文字，实现个性化的设计和定制。


It can be used for printing posters, leaflets, brochures and other advertising materials. It is widely used in the printing of packaging materials such as boxes and bags. It can also be used to print various patterns and words on textiles such as T-shirts, sweatshirts, towels, etc. to achieve personalized design and customization.

多色多工位精密微调丝印机

Multi-station Precision Micro-adjustment Screen Printing Machine

该产品为加强型精密微调多色印花机，加强型底座使整机在操作过程中更加稳固，配备多个独立的工位，可同时进行多件物品的印刷或同一物品的多道印刷工序，提高生产效率。工作台板采用铝合金台版，加热不易变形，调节方便。印刷更精准。

This product is a reinforced precision micro-adjustable multi-color printing machine with a reinforced base to make the whole machine more stable during operation, equipped with several independent workstations for simultaneous printing of multiple items or multiple printing processes for the same item to improve production efficiency. The working table plate adopts aluminum alloy table plate, which is not easy to be deformed by heating and easy to be adjusted. Printing is more accurate.

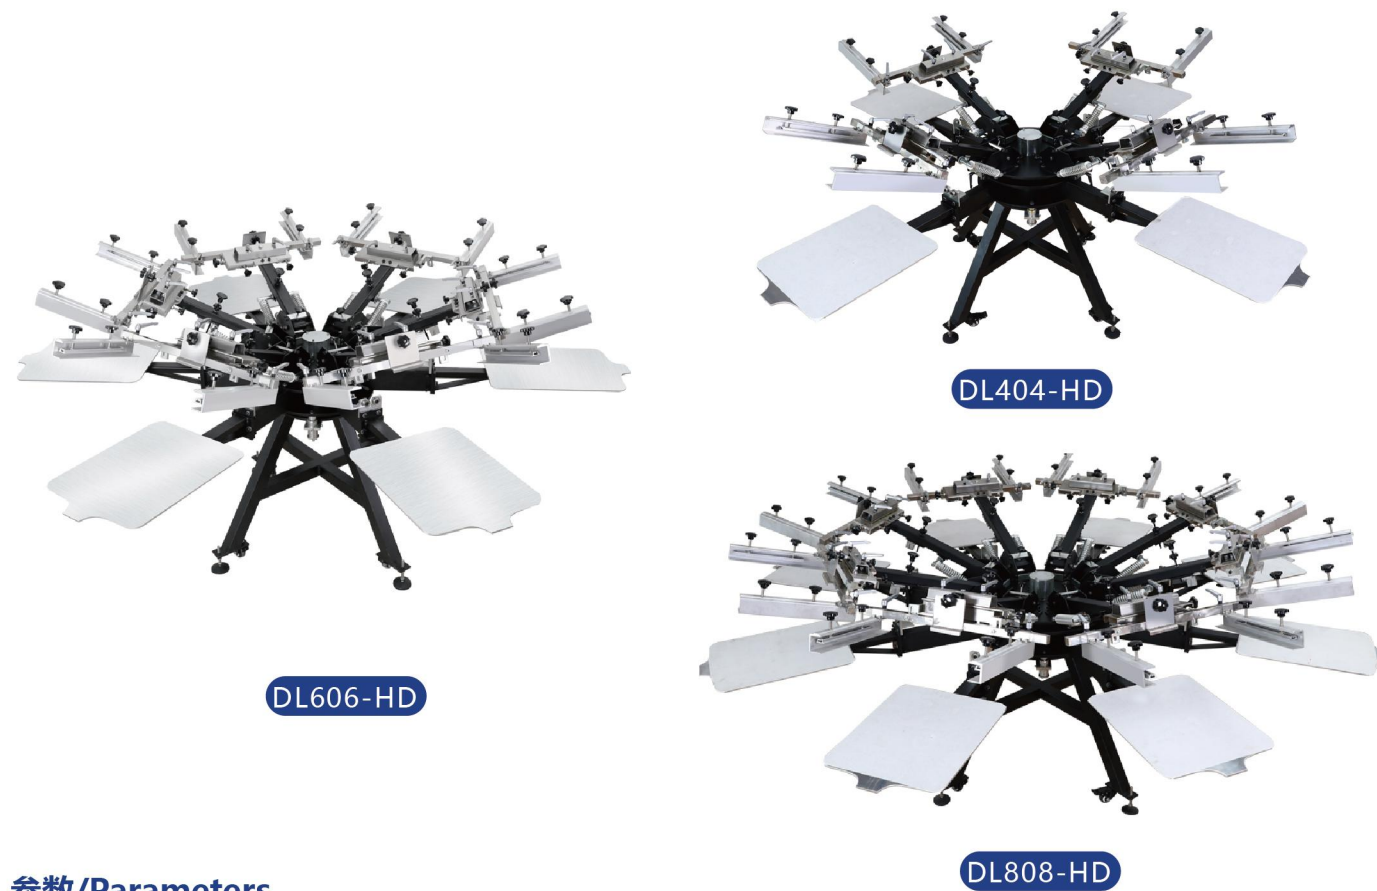

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	最大打印面积(mm) Max. Print Area	产品重量(kg) Product weight	外包装尺寸(mm) Package Size
DL606-HD	450*610	6色/6工位 6Color/6Station	650*700	400*550	350	1300*1100*1400
DL808-HD	450*610	8色/8工位 8Color/8Station	600*700	400*550	420	1710*1710*1350
DL404-HD	450*610	4色/4工位 4Color/4Station	650*700	400*550	300	990*990*1370

应用范围/Scope of Application

多色多工位丝印机，广泛应用于多色图案印刷，主用于成衣印刷，也可广泛应用于广告、纺织、工业、陶瓷、塑料制品等行业。多色多工位印刷，能提高生产效率，达到更好印刷效果。

Multi-color and multi-station screen printing machine, widely used in multi-color pattern printing, mainly used in garment printing, can also be widely used in advertising, textile, industry, ceramics, plastic products and other industries. Multi-color and multi-station printing can improve production efficiency and achieve better printing effect.

多色多工位手动丝印机

Multi-station Manual Screen Printing Machine

该产品为多色多工位印花机，配备多个独立的工位，可同时进行多件物品的印刷或同一物品的多道印刷工序，提高生产效率。网版和工作台可以独立旋转，操作更便捷。底座带脚轮，移动轻松方便，网版夹头配备有调节手柄调节方便。印刷更精准。

This product is a multi-color multi-station printing machine, equipped with several independent stations, which can be used for simultaneous printing of multiple items or multiple printing processes for the same item to improve production efficiency. The screen and worktable can be rotated independently for more convenient operation. The base is equipped with casters for easy and convenient movement, and the screen chuck is equipped with an adjustable handle for easy adjustment. Printing is more accurate.



型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	产品直径(mm) Max. Print Area	产品重量(kg) Product weight	外包装尺寸(mm) Package Size
NS606-ESU	450*610	6色/6工位 6Color/6Station	550*700	2326	156	860*730*670
NS808-ESU	450*610	8色/8工位 8Color/8Station	500*700	2640	238	/

应用范围/Scope of Application

多色多工位丝印机，广泛应用于多色图案印刷，广泛应用于服装、广告、纺织、工业、陶瓷、塑料制品等行业。多色多工位印刷，能提高生产效率，达到更好印刷效果。

Multi-color and multi-station screen printing machine, widely used in multi-color pattern printing, widely used in clothing, advertising, textile, industrial, ceramics, plastic products and other industries. Multi-color and multi-station printing can improve production efficiency and achieve better printing effect.

多色多工位微调丝印机

Multi-Color And Multi-Station Micro-Adjustable Screen Printing Machine

本系列机器台版为铝板，机架部分为斜叉式可拆装底座,既增加了操作的稳定性又节省了包装尺寸。双轮转，网版和工作台版可以独立旋转，底座带脚轮，移动轻松便捷。通过调节手柄可以精密微调网版套色，对版精确度高操作方便省时。

The table plate of this series machine is aluminum plate, and the frame part is inclined and detachable base, which not only increases the stability of operation but also saves the packing size. Double wheels, screen plate and table plate can be rotated independently, the base with casters, easy and convenient to move. Through the adjusting handle can be precise fine-tuning screen plate color registration, high accuracy of the plate operation is convenient and time-saving.



参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	最大打印面积(mm) Max. Print Area	产品重量(kg) Product weight	外包装尺寸(mm) Package Size
404-MR	450*610	4色/4工位 4Color/4Station	600*700	400*550	138	860*570*670

应用范围/Scope of Application

多色多工位丝印机，广泛应用于多色图案印刷，主用于成衣印刷，也可广泛应用于广告、纺织、工业、陶瓷、塑料制品等行业。多色多工位印刷，减少换网版时间，提高生产效率，达到更好印刷效果。


Multi-color and multi-station screen printing machine, widely used in multi-color pattern printing, mainly used in garment printing, can also be widely used in advertising, textile, industry, ceramics, plastic products and other industries. Multi-color and multi-station printing reduces the time of screen changing, improves the production efficiency and achieves better printing effect.

全伺服圆盘印花机


Full Servo Disc Printing Machine

全钢架底座，稳定坚固耐用。全自动印刷，只需2人操作即可，提高生产效率。每个颜色可单独打印。减少更换网版时间。可自动调节印刷高度，定位机构设计合理，套位精准。

Full steel frame base, stable and sturdy. Full-automatic printing, only 2 people can operate, improve production efficiency. Each color can be printed separately. Reduce the time of changing screen plate. Automatic adjustment of printing height, reasonable design of positioning mechanism, accurate registration.

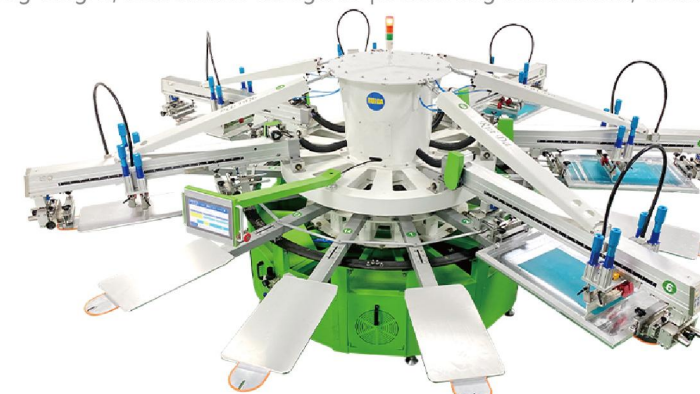

DL6014

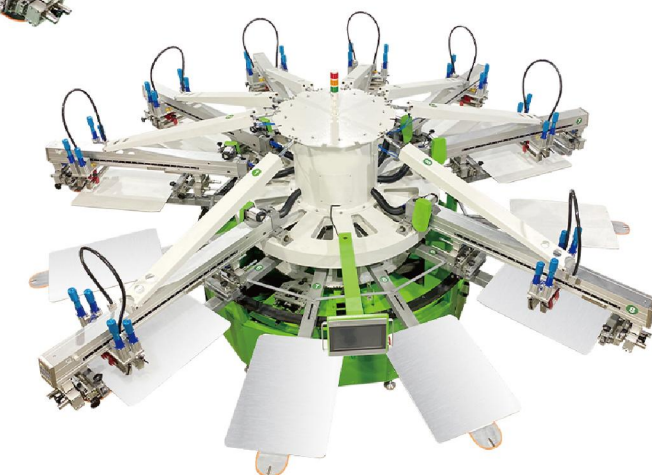

DL8012

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	最大打印面积(mm) Max. Print Area	产品重量(kg) Product weight
DL6014	500*700	6色/14工位 6Color/14Station	600*830	450*600	1800
DL8012	500*700	8色/12工位 8Color/12Station	600*830	450*600	2100
机器直径(mm) Machine diameter	打印精度(mm) Printing accuracy	气压规格(MPa) Air pressure specification	电压(v) Voltage	功率(kw) Power	打印速度(Pcs/h) Printing speed
4450	±0.05	0.6	220/380	3.4	750
4450	±0.05	0.6	220/380	5.2	750

应用范围/Scope of Application

常用于 T 恤、卫衣、等各类服装的图案印刷，可实现多种颜色和复杂图案的印花效果。如床单、被罩、窗帘等家纺产品的印花，能为家纺产品增添丰富的色彩和精美的图案。在皮革制品上印制各种花纹、商标等。

Commonly used in T-shirts, sweatshirts, and other types of clothing pattern printing, can achieve a variety of colors and complex patterns of the printing effect. Such as bed sheets, covers, curtains and other home textile products printing, can add rich colors and exquisite patterns for home textile products. Printing various patterns and trademarks on leather products.

UV打印机

UV Printing Machine

应用范围广，多材质适应性，可直接在平面或曲面材质上打印，无需复杂前处理。高精度与丰富色彩，即打即干，高效固化。无需制作印刷版，直接通过电脑设计稿打印，一件起印，成本低，适合个性化定制。


Wide range of applications, multi-material adaptability, can print directly on flat or curved materials without complex pre-treatment. High precision and rich colors, ready-to-dry, efficient curing. No need to make printing plate, directly through the computer design printing, one piece of printing, low cost, suitable for personalized customization.



3360



A3+

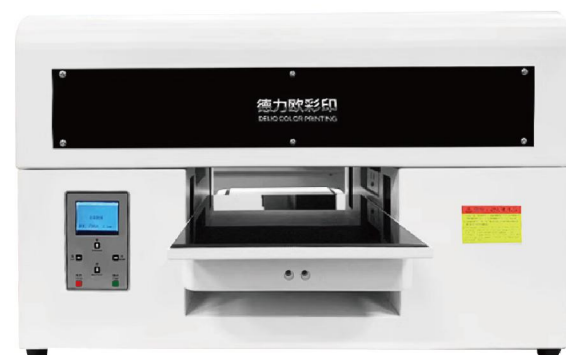

A4+



5060



A3双喷头
A3 Dual industrial head



A3工业级
A3 industrial grade



6090



6090工业级
6090 industrial grade

参数/Parameters

型号 Model	A4+	A3+	3360	5060	6090	A3工业级 A3 industrial grade	A3双喷头 A3 Dual Print Head	6090工业级 6090 industrial grade
产品尺寸(cm) Product size	58*47*37	76*73*56	96*86*60	116*104*45	156*142*69	83*72*55	83*72*55	156*142*69
打印尺寸(cm) Print size	20*30	30*50	33*60	50*60	60*90	30*50	30*50	60*90
打印高度(cm) Print height	5	17(可定制到25) 17(can be heightened to 25)	18(可定制到30) 18(can be heightened to 30)	17(可定制到30) 17(can be heightened to 30)	18(可定制到30) 18(can be heightened to 30)	15(可定制到30) 15(can be heightened to 30)	15(可定制到25) 15(can be heightened to 25)	18(可定制到30) 18(can be heightened to 30)
喷头 Printhead	XP600	TX800	TX800	TX800*2	XP600	I3200	TX800*2	I1600
接口方式 Interface method	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0	USB2.0/3.0
电源(v) Power	220/110	220/110	220/110	220/110	220/110	220/110	220/110	220/110
是否支持圆柱打印 Cylindrical printing	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
产品重量(kg) Product weight	26	60	96	110	180	90	90	180
颜色模式 Color mode	W+CMYK	W+CMYK	W+CMYK	W+CMYK	W+CMYK+V	W+CMYK+V	W+CMYK+V	W+CMYK+V

应用范围/Scope of Application

广泛应用于 广告、家居、礼品、工业、文创 等多个领域。如个性化礼品、纪念品、文创产品制作、零部件标识、外壳装饰、功能性标记、小批量服装设计、个性化服饰定制、尤其适合小批量、高附加值、快速迭代的 生产需求。

Widely used in advertising, home furnishing, gifts, industry, cultural creation and other fields. Such as personalized gifts, souvenirs, cultural and creative products, parts identification, shell decoration, functional marking, small batch clothing design, personalized apparel customization, especially suitable for small batch, high value-added, rapid iteration of the production needs.

油盘式移印机

Oil Pan Pad Printing Machine

移印机可以实现非常精细的图案和文字印刷。它通过精密的制版和印刷系统，能够将微小的图案细节清晰地转移到被印物体上。操作相对简单，工作人员可以根据不同的产品尺寸和印刷要求，对印刷参数进行调整。移印头可以根据物体表面的形状发生弹性形变，从而使油墨能够完整地转移到物体表面。

A pad printing machine allows for very fine pattern and text printing. It is capable of transferring tiny graphic details clearly onto the printed object by means of a sophisticated plate making and printing system. The operation is relatively simple and the staff can adjust the printing parameters according to different product sizes and printing requirements. The pad printing head can elastically deform according to the shape of the object's surface so that the ink can be transferred to the object's surface intact.



miniB单色
miniB Single color



mini2H/B单色双头
mini2H/B Single color two heads



mini2S/B双色穿梭
mini2S/B Two colors with shuttle



mini单色双头座台型
mini Desktop Single
color two heads



mini双色穿梭座台型
mini Desktop
Two-color shuttle



mini单色座台型
mini Desktop Single color



P1单色
P1 Single color




P2/S双色穿梭
P2/S Two-color shuttle



P2/S双色运输带
P2/S Two-colors
transport belt



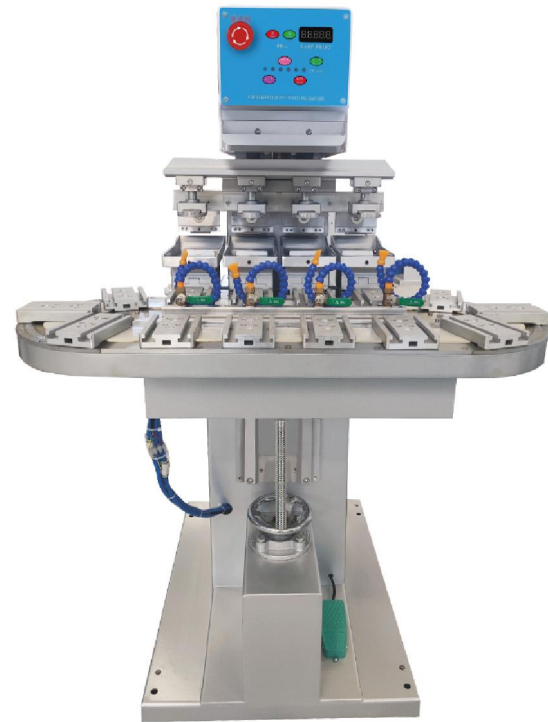

P4/C四色运输带
P4/C Four-colors
transport belt



P4/S四色穿梭
P4/S Four-colors shuttle



P4/S四色穿梭伺服
P4/S Four colors servo
with shuttle



P6/C六色运输带
P6/C Six-colors
transport belt



P6/S六色穿梭
P6/S Six-colors shuttle



P1/2H单色双头
P1/2H Single color two
heads

参数/Parameters

型号 Model	钢板尺寸(mm) Steel plate size	速度(Pcs/h) speed	油墨直径(mm) Ink Cap Diam	油墨最大直径(mm) Max. Ink Cap Diam	用气压力(bar) Pressure	产品重量(kg) Product weight	产品尺寸(mm) Product size
mini单色双头 (座台型) mini Desktop Single color two heads	100*100	3000	60/90	90	5	45	560*400*600
mini单色单头 (座台型) mini Desktop Single color	100*100	3000	60/90	90	5	40	560*400*600
mini/B单色 miniB Single color	100*100	3000	60/90	90	5	68	560*420*1200
mini2H/B单色双头 mini2H/B Single color two heads	100*100	3000	60/90	90	5	65	560*420*1200
mini双色穿梭 (座台型) mini Desktop Two-color shuttle	100*100	1600	60/90	90	5	75	560*450*600
mini2S/B双色穿梭 mini2S/B Two colors with shuttle	100*100	1600	60/90	90	5	75	560*420*1200
P1单色 P1 Single color	100*150	2000	60/90	90	5	100	750*450*1350
P1/2H单色双头 P1/2H Single color two heads	100*150	2000	60/90	90	5	105	750*450*1350
P2/S双色穿梭 P2/S Two-color shuttle	100*150	1400	60/90	90	5	115	750*450*1350
P2/S双色运输带 P2/S Two-colors transport belt	100*150	1600	60/90	90	5	140	800*670*1350
P4/S四色穿梭伺服 P4/S Four colors servo with shuttle	100*150	1400	60/90	90	5	145	750*860*1350
P4/S四色穿梭 P4/S Four-colors shuttle	100*150	1400	60/90	90	5	145	750*660*1350
P4/C四色运输带 P4/C Four-colors transport belt	100*150	1600	60/90	90	5	180	950*960*1350
P6/S六色穿梭 P6/S Six-colors shuttle	100*150	500	60/90	90	5	200	850*920*1350
P6/C六色运输带 P6/C Six-colors transport belt	100*150	1600	60/90	90	5	230	1200*960*1350

应用范围/Scope of Application

移印机能够在各种不同形状的物体表面进行印刷，无论是平面、球面还是不规则曲面。日常生活中有大量的塑料制品需要印刷，如塑料玩具。在一些高精度的五金工具上，移印机能够准确地印上刻度数字。常见的玻璃器皿如玻璃杯、玻璃瓶等。或是不规则产品，如安全帽等，均可使用。

The pad printing machine is able to print on the surface of objects of different shapes, whether flat, spherical or irregularly curved. There are a large number of plastic products in daily life that need to be printed, such as plastic toys. On some high-precision hardware tools, pad printing machines can accurately print scale numbers. Common glassware such as glass cups, glass bottles and so on. Or irregular products, such as safety helmets, can be used.

油盅式移印机

Oil Cup Pad Printing Machine

油盅式移印机，油盅装墨，油墨不易干，使用时间更长。移印机操作简单，可以根据不同的产品尺寸和印刷要求，对印刷参数进行调整。移印胶头可以根据物体表面的形状发生弹性形变，从而使油墨能够完整地转移到物体表面。

Oil cup type pad printing machine, oil cup loaded with ink, ink is not easy to dry, the use of time is longer. The pad printing machine is easy to operate and the printing parameters can be adjusted according to different product sizes and printing requirements. The pad printing tip can undergo elastic deformation according to the shape of the object surface, so that the ink can be transferred to the object surface completely.



参数/Parameters

型号 Model	中机型 Medium-Sized	中机型 Medium-Sized	中机型 Medium-Sized	标准型 Standard Type
钢片尺码(mm) Steel Sheet Size	100*250	100*215	100*225	100*250
速度(Pcs/h) Speed	4800	4800	4800	4800
最大印刷面积(mm) Max. Printing Area	70*55	70*55	70*55	70*55
胶头平移行程(mm) Rubber Head Move Stroke	125	125	125	125
用气压力(bar) Pressure	4-6	4-6	4-6	4-6
产品重量(kg) Product Weight	65	65	65	65
产品尺寸(mm) Product Size	450*550*1020	450*550*1020	450*550*1020	450*550*1020
油杯直径(mm) Oil Cup Diameter	90	90	90	90



应用范围/Scope of Application

移印机能够广泛应用于日常产品，U盘logo印制、一些小型塑料玩偶的眼睛、嘴巴等细节部分的印制、五金小配件如螺丝、螺母等，移印机可以在其头部或侧面印上规格型号等标记、也可以在化妆品瓶身上印制logo等。

Pad printing machine can be widely used in daily products, USB flash drive logo printing, some small plastic dolls eyes, mouth and other details of the printing, hardware accessories such as screws, nuts, etc., pad printing machine can be printed on the head or side of the specifications and other markings, but also in the body of the cosmetic bottles to print the logo and so on.

小型气动移印机

Small Pneumatic Pad Printing Machine

机身整体 体积较小，占用空间少，便于在生产车间、工作室等不同场所放置和使用。采用气动驱动系统，操作简单，易于上手。机身由铝合金压铸而成，既轻便又坚固，为整个机器提供稳定的支撑结构。

The overall body of the machine is small in size and occupies less space, which is easy to be placed and used in different places such as production workshops and studios. Adopting pneumatic drive system, simple operation, easy to get started. The body is made of aluminum alloy die-casting, which is both lightweight and sturdy, providing a stable support structure for the whole machine.



100*250不带微调
No Fine-tuning



100*250带微调
Fine-tuning



100*215不带微调
No Fine-tuning



100*215带微调
Fine-tuning



85*175不带微调
No Fine-tuning



100*215带微调
Fine-tuning

参数/Parameters

型号(升级版) Model(upgraded version)	100*250	100*250	100*215	100*215	85*175(厚钢板) Thick steel plate	85*175(厚钢板) Thick steel plate
是否带微调 With or without fine tuning	不带微调 No Fine-tuning	带微调 Fine-tuning	不带微调 No Fine-tuning	带微调 Fine-tuning	不带微调 No Fine-tuning	带微调 Fine-tuning
钢片尺寸(mm) Steel Sheet Size	100*250	100*250	100*215	100*215	85*175	85*175
印刷面积(mm) Max. Printing Area	75*75(不成正比) disproportionate	75*75(不成正比) disproportionate	75*75(不成正比) disproportionate	75*75(不成正比) disproportionate	55*55(不成正比) disproportionate	55*55(不成正比) disproportionate
胶头平移行程(mm) Rubber Head Move Stroke	125	125	125	125	125	125
用气压力(bar) Pressure	4-6	4-6	4-6	4-6	4-6	4-6
产品重量(kg) Product Weight	27	27	27	27	27	27
产品尺寸(mm) Product Size	600*270*570	600*270*570	600*270*570	600*270*570	600*270*570	600*270*570
油杯直径(mm) Oil Cup Diameter	90/100	90/100	90/100	90/100	70/80	70/80
功率(w) Power	50	50	50	50	50	50

应用范围/Scope of Application

应用广泛，适合多种行业。可用于印刷电子产品的外壳、电路板、显示屏等上面的标识、型号、生产日期等信息。也可在玩具表面印刷各种卡通形象、品牌标志、安全警示语等。或是化妆品瓶身、牙膏管、香皂盒等日用品的表面印刷品牌标识、产品说明等。

Wide range of applications, suitable for a variety of industries. It can be used to print the logo, model number, production date and other information on the shells, circuit boards, displays, etc. of electronic products. Can also be printed on the surface of toys with various cartoon images, brand logos, safety warnings and so on. Or cosmetic bottles, toothpaste tubes, soap boxes and other daily necessities on the surface of the printing of brand logos, product descriptions and so on.

美甲移印机 Nail Pad Printing Machine



美甲移印机通常具有较高的自动化程度，可以实现自动油墨填充、印头下降、上升、印刷和清洁等功能，提高工作效率，减少人工操作。操作简单。

Nail pad printing machines usually have a high degree of automation, which can realize the functions of automatic ink filling, head lowering, raising, printing and cleaning, etc. to improve work efficiency and reduce manual operation. Simple operation.



参数/Parameters

型号 Model	DL200D	
钢片尺寸 (mm) Steel sheet size	200*250	800
速度 (Pcs/hr) Speed		
最大印刷面积 (mm) Max. printing area	180*230	168
产品重量 (kg) Product weight		
产品尺寸 (mm) Product size	1020*580*1450	
电压 (v) Voltage	110/220	40
功率 (w) Power		

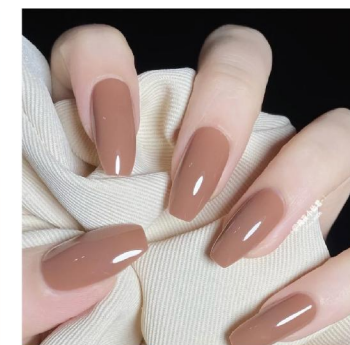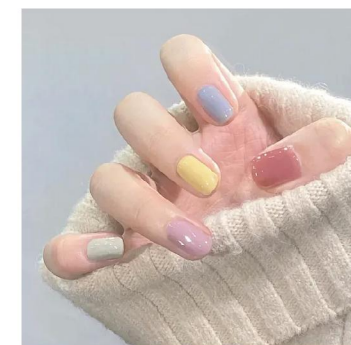

应用范围/Scope of Application

美甲移印机不仅可以用于美甲行业，还可以用于印刷各种塑料制品、电子产品、玩具、文具等物品的表面的印刷。

Nail pad printing machine can be used not only for nail industry, but also for printing various plastic products, electronic products, toys, stationery and other items on the surface of the printing.

手持喷码打印机

Handheld Coding Printer

手持喷码打印机，体积小巧、重量较轻，可随身携带，能在各种场地使用。操作简便，上手就能使用。喷印质量高，适应性广。

Handheld inkjet printer, compact size, light weight, can be carried around, can be used in a variety of venues. Easy to operate, hands-on can be used. Printing quality is high, wide adaptability.



T8

参数/Parameters

型号 Model	T8-12.7	T8-25.4
打印精度 Printing accuracy	600DPI	600DPI
产品尺寸 Product Size	235*130*147mm	235*130*147mm
墨盒容量 Cartridge Capacity	42ML	42ML
存储空间 Information storage	3GB	3GB
功率 Power	5V	5V
接口 Interfaces	TYPE-C	TYPE-C
打印距离 Printing distance	2-5mm	2-5mm
产品重量 Product weight	1kg	1kg
屏幕尺寸 Screen size	4.5寸/4.5inch	4.5寸/4.5inch
喷印字高 Printed character height	2-12.7mm	2-25.4mm

应用范围/Scope of Application

应用范围广，用于喷印生产日期、保质期、批次号、配料表、溯源码等信息。也可喷印药品的名称、剂型、规格、有效期、批准文号，以及化工产品的成分、含量、使用说明、安全警示等内容。对电子产品的外壳、电路板、显示屏等部件喷印型号、序列号、二维码等标识。

Wide range of applications for printing production date, shelf life, batch number, ingredient list, traceability code and other information. It can also be used to print the name, dosage form, specification, expiration date, approval number of pharmaceutical products, as well as the composition, content, instructions for use, safety warnings and other content of chemical products. The shell of electronic products, circuit boards, displays and other parts of the spray-printed model, serial number, two-dimensional code and other signs.

全自动智能热压机

Automatic Intelligent Heat Press

具备高精度的温控系统与压力调节装置，能根据材料特性和工艺需求精确调节温度、压力和时间等参数，确保热压效果的一致性和稳定性。配备先进的控制系统，大幅减少人工操作，提高生产效率，降低人工成本。

Equipped with high-precision temperature control system and pressure regulating device, it can precisely adjust the parameters of temperature, pressure and time according to the material characteristics and process requirements to ensure the consistency and stability of the hot pressing effect. Equipped with advanced control system, it greatly reduces manual operation, improves production efficiency and lowers labor cost.



White



Pink



Blue



Denim blue

参数/Parameters

型号 Model	白色 White	粉色 Pink	蓝色 Blue	牛仔蓝 Denim blue
产品重量(kg) Product weight	16.7kg	16.7kg	16.7kg	16.7kg
电压(V) Max. Screen Thickness	220	220	220	220
产品尺寸(cm) Machine Size	50*41.4*29	50*41.4*29	50*41.4*29	50*41.4*29

应用范围/Scope of Application

应用广泛，能在棉、麻、化纤等织物上进行烫画转印服装diy，如亲子装，情侣装，工作服、或是包装烫画转印等。

Wide range of applications, can be in cotton, linen, chemical fiber and other fabrics for hot stamping transfer clothing diy, such as parent-child clothing, couples clothing, work clothes, or packaging hot stamping transfer.

大工位烫画机

Large Format Heat Press Machines

工作台面大，可承载大型号广告牌及片装印画等，能满足大面积烫印需求。升温快且温度均匀，温差系数小，确保烫印效果好。可根据不同承印物和烫印要求随意调节，保证图案转移质量。

The working table is large enough to carry large-sized billboards and sheet mounted prints, etc., which can meet the needs of large-area hot stamping. Fast heating and uniform temperature, small temperature difference coefficient, to ensure good stamping effect. It can be adjusted according to different substrates and stamping requirements to ensure the quality of pattern transfer.



参数/Parameters

型号 Model	发热板尺寸mm) Heating plate size	电压(V) Voltage	功率(W) Power	产品尺寸(mm) Product size	产品重量(kg) Product weight	最高温度(°C) Highest temperature	时间控温范围(Sec) Time Range
MK-HT80100	800*1000	220/110	5000	700*1420*1100	220	220	0-999

应用范围/Scope of Application

适用于广告牌、海报等广告制品的制作，可将彩色图案、文字等烫印到相关材料上，制作出醒目、美观的宣传物料。烫画转印到服装、手袋、鞋帽等织物上，适合大规模服装印花生产，如品牌服装批量烫印 logo、图案等。

Applicable to the production of billboards, posters and other advertising products, can be colorful patterns, text and other hot stamping to the relevant materials to produce eye-catching, beautiful promotional materials. Hot stamping transfer to clothing, handbags, shoes and hats and other fabrics, suitable for large-scale clothing printing production, such as brand clothing batch hot stamping logo, pattern, etc.

双工位烫标机

Double Station Heat Press Machine

双工位设计使得可以同时进行两个烫印任务，大大提高了生产效率。精准定位，操作简便，温度、压力、转印时间等参数均可根据实际要求进行设置。

Dual station design makes it possible to carry out two stamping tasks at the same time, which greatly improves the production efficiency. Precise positioning, easy operation, temperature, pressure, transfer time and other parameters can be set according to actual requirements.



参数/Parameters

型号 Model	发热板尺寸mm) Heating plate size	电压(V) Voltage	功率(W) Power	产品尺寸(mm) Product size	产品重量(kg) Product weight	最高温度(°C) Highest temperature	时间控温范围(Sec) Time Range
DL1515	150*150	220/110	2200	900*500*1300	89.6	399	0-999

应用范围/Scope of Application

广泛应用于服装、箱包、鞋类、皮革等相关产品的烫商标工艺，如服装行业的烫唛头、鞋类鞋舌的商标、内里标等。

Widely used in clothing, bags, footwear, leather and other related products ironing trademark process, such as the clothing industry, ironing mark, footwear tongue of the trademark, lining label, etc.

平板热转印机

Flatbed Heat Transfer Machine

平板热转印机是一种将各种烫画或转印材料通过加热和加压的方式，将图案转印到织物、瓷板、金属板等承印物上。通过发热板发热，利用一定压力、特定温度和时间，将转印纸上的图层和热固贴合到承印物上，或将图层渗透到承印物料内部。

Flatbed heat transfer machine is a kind of various hot stamping or transfer material by heating and pressurizing, the pattern will be transferred to the fabric, porcelain plate, metal plate and other substrates. Through the heat generated by the heating plate, using a certain pressure, specific temperature and time, the layer on the transfer paper and heat-set affixed to the substrate, or the layer will penetrate into the substrate material inside.



MK-TH38*38



MK-TH38*38蓝色



MK-TH40*60



DLO3838-PA



DLO3838-PL & DLO4060-PL



DLO4060-PA



DLO3838-PS



DLO4060-PS

参数/Parameters

特点 Feature	高压热转印机 High Pressure Heat Transfer Machine			高压带推拉热转印机 High Pressure Push-Pull Heat Transfer Machine		欧式带推拉热转印机 European style push-pull heat transfer machine		磁力半自动热转印机 Magnetic semi-automatic heat transfer machine	
型号 Model	MK-TH38*38	MK-TH38*38 (蓝色/blue)	MK-TH40*60	DLO3838-PL	DLO4060-PL	DLO3838-PA	DLO4060-PA	DLO3838-PS	DLO4060-PS
发热板尺寸(mm) Heating Plate Size	38*38	38*38	40*60	38*38	40*60	38*38	40*60	38*38	40*60
包装尺寸(mm) Package Size	67*46*43	67*46*43	69.5*68.5*43	67*46*43	69.5*68.5*43	72*45*44	80*71*55	72*45*44	80*71*55
产品重量(kg) Product weight	21	21	32	22	34	24	36	24	36
最高温度(°C) Highest Temperature	220	220	220	220	220	220	220	220	220
时间控制范围(Sec) Time control range	0-999	0-999	0-999	0-999	0-999	0-999	0-999	0-999	0-999
功率(w) Power	1800	1800	2500	1800	2500	1800	2800	1800	2800
电压(v) Voltage	220/110	220/110	220/110	220/110	220/110	220/110	220/110	220/110	220/110

应用范围/Scope of Application

应用广泛，能在棉、麻、化纤等织物上进行烫画转印，还可用于瓷板、金属板、皮革等材质，满足不同产品的印花需求。在 T 恤、卫衣、衬衫等服装上印制个性化的图案、文字或照片，满足消费者对于独特服装的需求，如定制情侣装、亲子装、团队服装等。

Wide range of applications, can be in cotton, linen, chemical fiber and other fabrics for hot stamping transfer, can also be used for porcelain plate, metal plate, leather and other materials, to meet the printing needs of different products. In T-shirts, sweatshirts, shirts and other clothing printed on personalized patterns, text or photos to meet consumer demand for unique clothing, such as custom couples, parent-child clothing, team clothing.

双工位气动热转印机 Duplex Pneumatic Heat Transfer Machine

双工位 气动 热转印机，可以快速烫印两件物品。提高烫印速度，支架带脚轮，方便移动。加上红外定位，烫画位置更精准。快速便捷操作简单。通过热烫印机转印到物品上，印刷图案层次丰富，色彩鲜艳，干变万化，色差小，再现性好。

Duplex pneumatic heat transfer machine for quick stamping of two items. Increase the stamping speed, the stand with casters, easy to move. Plus infrared positioning, more accurate stamping position. Quick and convenient operation is simple. Through the hot stamping machine transferring to the items, the printing pattern is rich in layers, bright colors, dry changeable, small color difference and good reproducibility.



白色/White

参数/Parameters

型号 Model	白色/white	蓝色/blue
发热板尺寸(cm) Heating Plate Size	40*60	40*60
产品尺寸(cm) Product Size	130*79*107	130*79*107
产品重量(kg) Product weight	130	140
最高温度(°F) Highest Temperature	399	399
时间控制范围(Sec) Time control range	0-999	0-999
功率(w) Power	1800	1800
外包装尺寸(cm) Package Size	134*75*60	134*75*60



蓝色/Blue

应用范围/Scope of Application

广泛应用于服装定制、家居用品、礼品定制、工艺品制作等。在 T 恤、卫衣、衬衫等服装上印制个性化的图案、文字或照片，如定制情侣装、亲子装、团队服装等。也可在杯子、盘子、钥匙扣、手机壳等礼品上印制特定的图案或文字，制作出独一无二的礼品，增加礼品的纪念价值。

Widely used in clothing customization, home furnishings, gift customization, crafts production and so on. Print personalized patterns, text or photos on T-shirts, sweatshirts, shirts and other garments, such as customized couples' clothing, parent-child clothing, team clothing and so on. Can also be printed on cups, plates, keychains, cell phone cases and other gifts with specific patterns or text, to create a unique gift, increase the commemorative value of the gift.

多合一热转印机 All-in-one Heat Transfer Machine

多合一热转印机是一种集合了多种热转印功能于一体的设备，可在不同材质和形状的物品上进行图案转印。一台设备可实现多种热转印功能，能满足不同客户对不同产品的个性化定制需求。

An all-in-one heat transfer machine is a device that combines a variety of heat transfer functions in one, allowing for pattern transfer on items of different materials and shapes. One machine can realize multiple heat transfer functions, which can meet the personalized customization needs of different customers for different products.



参数/Parameters

型号 Model	五合一 5-in-1	八合一 8-in-1
发热板尺寸(cm) Heating Plate Size	29*38	29*38
外包装尺寸(cm) Package Size	54*46*45	54*46*45
产品重量(kg) Product weight	22	22
最高温度(°F) Highest Temperature	399	399
时间控制范围(Sec) Time control range	0-999	0-999
功率(w) Power	1250	1250

8-in-1(配件/accessory)



马克杯印烫配件
Mug Printing
Accessories



帽子印烫
Hot Stamping
On Hat



盘子印烫垫8/10cm
Plate Printing
Pad(8/10cm)



马克杯印烫配件
Mug Printing
Accessories



锥形杯印烫
Cone Cup
Printing



大号锥形杯印烫
Large Tapered
Mug Printed

应用范围/Scope of Application

应用广泛，如制作个性化服装、杯子、帽子、盘子等。个性化礼品定制、服装装饰、家居用品装饰、广告宣传与促销等。

Wide range of applications, such as making personalized clothing, cups, hats, plates, etc. Personalized gift customization, clothing decoration, home furnishing decoration, advertising and promotion, etc.

5-in-1(配件/accessory)



马克杯印烫配件
Mug Printing
Accessories



帽子印烫
Hot Stamping
On Hat



盘子印烫垫8/10cm
Plate Printing
Pad(8/10cm)

烫标机

Hot Stamping Machine

烫标机是一种用于将商标、图案或文字等标识通过加热和压力的方式转移或烫印到各种物品表面的设备，结构简单，操作方便，适用于小批量生产或样品制作。能够快速完成烫标操作，大大提高生产效率。

Hot stamping machine is a kind of equipment used for transferring or hot stamping the logo, pattern or text, etc. onto the surface of various articles by means of heat and pressure, with simple structure and easy operation, suitable for small batch production or sample making. It can quickly complete the hot stamping operation and greatly improve the production efficiency.

参数/Parameters

型号 Model	MIK-TB10*10	MIK-TB12*12	MIK-TB15*15	MIK-TB20*20
发热板尺寸(cm) Heating Plate Size	10*10	12*12	15*15	20*20
外包装尺寸(cm) Package Size	52*37*38	52*37*38	52*37*38	52*37*38
产品重量(kg) Product weight	10	10.5	11	12.8
最高温度(°C) Highest Temperature	220	220	220	220
时间控制范围(Sec) Time control range	0-999	0-999	0-999	0-999
功率(w) Power	450	450	450	450
电压(v) Voltage	220/110	220/110	220/110	220/110



应用范围/Scope of Application

常用于服装、箱包、皮革制品等行业。用于在服装上烫印品牌商标、尺码标签、洗涤说明等标识。或皮衣、皮包等皮革制品上的商标烫印。还可应用于家纺、玩具、礼品、电子产品等行业，用于产品的标识烫印或装饰。

Commonly used in clothing, bags, leather products and other industries. Used for stamping brand logo, size label, washing instructions and other logos on garments. Or leather clothing, leather bags, wallets and other leather products on the logo hot stamping. Can also be used in home textiles, toys, gifts, electronic products and other industries, for product logo stamping or decoration.

烫帽机

Hat heat transfer machine

专门用于在帽子上进行图案或标识的热转印，能将各种复杂、精美的图案清晰、牢固地转印到帽子上，色彩鲜艳、持久，不易褪色。能够满足不同客户对于帽子图案、颜色和风格的个性化需求，可印制各种创意设计。体积较小、操作简便、适合小批量生产或个人使用。

Specially used for heat transfer printing of patterns or logos on hats, it can transfer all kinds of complicated and exquisite patterns to hats clearly and firmly, with bright and long-lasting colors that are not easy to fade. Can meet the personalized needs of different customers for hat patterns, colors and styles, and can print a variety of creative designs. Small size, easy to operate, suitable for small batch production or personal use.

参数/Parameters

型号 Model	烫帽机 Hat heat transfer machine
可烫尺寸(cm) Ironable size	9.9*14
产品尺寸(cm) Product Size	50*37*47
产品重量(kg) Product weight	11
最高温度(°C) Highest Temperature	220
电压(v) Voltage	220/110



应用范围/Scope of Application

可以在各种材质的帽子上进行热转印，如棉质、麻质、聚酯纤维等。适用于图案定制、工作帽定制、一般只需将帽子放置在指定位置，调节好温度、时间和压力等参数，即可开始热转印操作，易于上手。

Heat transfers can be done on hats made of various materials, such as cotton, linen, polyester, etc. Suitable for pattern customization, work cap customization, generally only need to place the hat in the designated position, adjust the temperature, time and pressure and other parameters, you can start the heat transfer operation, easy to get started.



烫杯机

Mug Heat Transfer Machine

体积小巧、便于携带，适用于家庭用户或手工爱好者进行少量杯子的个性化烫印，可将图案或文字转印到杯子上。能将各种复杂、精美的图案清晰、牢固地转印到杯子上，色彩鲜艳、持久，不易褪色。通常只需将杯子放置在指定位置，调节好温度、时间等参数，即可开始烫印操作，易于上手。

Compact and portable, it is suitable for home users or craft enthusiasts to personalize a small number of cups by transferring patterns or text onto the cups. Can be a variety of complex, exquisite design clear, solid transfer to the cup, colorful, durable, not easy to fade. Usually only need to place the cup in the designated position, adjust the temperature, time and other parameters, you can start stamping operation, easy to get started.

参数/Parameters

型号 Model	烫杯机 Mug Heat Transfer Machine
可烫产品直径(cm) Diameter of ironable products	8.2-9
外包装尺寸(cm) Package Size	38*35*34
产品重量(kg) Product weight	8
最高温度(°C) Highest Temperature	250
时间控制范围(Sec) Time control range	0-999
功率(w) Power	300
电压(v) Voltage	220/110



应用范围/Scope of Application

可以在各种材质的杯子上进行烫印，如陶瓷杯、玻璃杯、不锈钢杯、马克杯等。根据杯子烫印机的性能和要求，选择材质、尺寸和形状匹配的杯子和烫印纸或墨水，以保证烫印效果。

It can be hot stamped on cups made of various materials, such as ceramic cups, glass cups, stainless steel cups, mugs and so on. According to the performance and requirements of the cup stamping machine, choose the material, size and shape matching cups and stamping paper or ink to ensure the stamping effect.

半自动高精密丝印机

Flat Manual Screen Printing Table

多合一热转印机是一种集成了多种热转印功能于一体的设备，可在不同材质和形状的物品上进行图案转印。一台设备可实现多种热转印功能，能满足不同客户对不同产品的个性化定制需求。

An all-in-one heat transfer machine is a device that combines a variety of heat transfer functions in one, allowing for pattern transfer on items of different materials and shapes. One machine can realize multiple heat transfer functions, which can meet the personalized customization needs of different customers for different products.

参数/Parameters

型号 Model	十合一 10-in-1
发热板尺寸(cm) Heating Plate Size	29*38
外包装尺寸(cm) Package Size	54*46*45
产品重量(kg) Product weight	22
最高温度(°F) Highest Temperature	399
时间控制范围(Sec) Time control range	0-999
功率(w) Power	1250



10-in-1(配件/accessory)



马克杯印烫配件
Mug Printing Accessories



帽子印烫
Hot Stamping On Hat



盘子印烫垫8/10cm
Plate Printing Pad(8/10cm)



11盎司杯印烫配件
11oz mug printing mat



12盎司锥形杯印烫
12oz conic mug heat mat



17盎司锥形杯印烫
17oz conic mug heat mat



迷你杯印烫配件
Mini mug printing mat



7.1加长杯印烫配件
7.1 Lengthening mug printing mat

应用范围/Scope of Application

适用于各种平面材料，应用范围广，如海报印刷、标识制作、T恤印花、纸盒印刷、陶瓷工艺品印刷等。

It is suitable for all kinds of flat materials and has a wide range of applications, such as poster printing, logo making, T-shirt printing, carton printing, ceramic handicrafts printing, etc.

冷裱覆膜机

Cold Laminating And Laminating Machine

该款覆膜机无需过多人工干预，具有高效生产、精准稳定、节省人力。覆膜能有效防止材料表面受到划伤、磨损、污渍、水分等因素的影响，延长材料的使用寿命。

This laminating machine does not require too much manual intervention and has high efficiency production, precision and stability, and saves labor. Laminating can effectively prevent the surface of the material from being affected by scratches, abrasion, stains, moisture and other factors, prolonging the service life of the material.



DLO500/700



DLO500S

型号 Model	胶辊直径(cm) Diameter of rubber roller	胶辊宽(cm) Roller width	覆膜最大宽度(cm) Max. width of lamination	覆膜速度(米/分钟) Laminating speed (m/min)	覆膜产品厚度(cm) Thickness of laminated products	产品尺寸(cm) Product size	台面/胶辊款式 Product size
DLO500-50D	5	50	43	1—15	5	100*50*103	不锈钢平台 双面单组胶辊 Stainless steel platform, double sided Single set of rollers
DLO500	5	50	43	1—15	5	115*50*103	不锈钢平台 双面双组胶辊 Stainless steel platform, double-sided Double set of rubber rollers
DLO500S	5	50	43	1—15	5	115*50*105	一边输送带 单面单组胶辊 One side conveyor belt, one side one set of rollers
DLO500S1-50D	5	50	43	1—15	5	120*50*103	一边输送带 双面单组胶辊 One side conveyor belt, double sided single set of rollers
DLO500S1-50S	5	50	43	1—15	5	135*50*103	一边输送带 双面双组胶辊 One side of the belt, both sides Double set of rollers
DLO500S2-50D	5	50	43	1—15	5	140*50*103	两边输送带 双面单组胶辊 Conveyor belts on both sides, double sided Single set of rollers
DLO500S2-50S	5	50	43	1—15	5	150*50*103	两边输送带 双面双组胶辊 Conveyor belt on both sides, double sided Double set of rollers
DLO700	5	70	63	1—15	5	115*70*103	不锈钢平台 双面双组胶辊 Stainless steel platform, double sided Double set of rubber rollers
DLO700-50D	5	70	63	1—15	5	100*70*103	不锈钢平台 双面单组胶辊 Stainless steel platform, double sided Single set of rollers
DLO700S	5	70	63	1—15	5	115*70*103	一边输送带 单面单组胶辊 One side conveyor belt, one side one set of rollers
DLO700S1-50D	5	70	63	1—15	5	120*70*103	一边输送带 双面单组胶辊 One side conveyor belt, double sided single set of rollers
DLO700S1-50S	5	70	63	1—15	5	135*70*103	一边输送带 双面双组胶辊 One side of the belt, both sides Double set of rollers
DLO700S2-50D	5	70	63	1—15	5	140*70*103	两边输送带 双面单组胶辊 Conveyor belts on both sides, double sided Single set of rollers
DLO700S2-50S	5	70	63	1—15	5	150*70*103	两边输送带 双面双组胶辊 Conveyor belt on both sides, double sided Double set of rollers

700与500外观相同/700 and 500 appearance is the same

应用范围/Scope of Application

常用于板材行业、装饰行业、五金行业等。对书籍封面、杂志内页、包装盒、对木板、铝板、铁板等进行覆膜。
Commonly used in the plate industry, decorative industry, hardware industry, etc. . Laminating book covers, magazine inserts, packaging boxes, laminating wooden boards, aluminum boards, iron boards, etc.

卧式烘版箱
Horizontal Plate dryer

采用多层抽屉式设计，每层抽屉独立，互不干扰，可同时烘干多个网版，提高工作效率。依靠合理的运风设计，能让箱内温度快速达到均匀状态，使得网版各部位受热一致，避免因局部温度过高或过低导致的感光胶干燥不均匀、网版变形等问题，保证烘干质量。

Adopting multi-layer drawer design, each drawer is independent and does not interfere with each other, it can dry several stencils at the same time and improve the working efficiency. Relying on reasonable air transport design, the temperature inside the box can quickly reach a uniform state, so that all parts of the screen plate are heated uniformly, avoiding uneven drying of photop emulsion and screen plate deformation caused by too high or too low a local temperature to ensure the quality of drying.



参数/Parameters

特点 Feature	普通款 Regular model		带检测台，带玻璃层和灯管 With test bench with glass layer and lamps	
型号 Model	90*120	120*150	90*120玻璃 90*120glass	120*150玻璃 120*150glass
温度范围 Temperature range	0-100℃	0-100℃	0-100℃	0-100℃
功率(kw) Power	3	3	3	3
产品尺寸(mm) Product Size	1000*1250*1100	1300*1550*1100	1000*1250*1250	1300*1550*1250
产品重量(kg) Product Weight	100/150KG	100/150KG	100/150KG	100/150KG

应用范围/Scope of Application

是丝网印刷中网版制作的关键设备之一，用于烘干涂布有感光胶的丝印网版。也可用于印刷制品的油墨固化，提高油墨的干燥速度和牢固度。还适用于塑料、喷涂等行业的烘烤烘干，干燥固化等

It is one of the key equipments for screen making in screen printing, used for drying the screen printing screen coated with photopolymer. It can also be used for ink curing of printing products to improve the drying speed and firmness of ink. It is also suitable for baking and drying, drying and curing in plastic, spraying and other industries.

工业高温烤箱
Industrial High Temperature Oven

工业高温烤箱是工业生产中用于对物料进行高温烘烤、干燥、固化等处理的设备。采用优质不锈钢板制作，具有良好的强度和耐腐蚀性。箱体外部通常会进行隔热处理，以减少热量散失，降低能耗和避免操作人员烫伤。配备有多重安全保护装置，如超温报警、漏电保护、过载保护、防火防爆装置等，确保设备在运行过程中的安全性，防止事故发生。

Industrial high temperature oven is used in industrial production for high temperature baking, drying, curing and other processing equipment for materials. It is made of high quality stainless steel plate with good strength and corrosion resistance. The exterior of the cabinet is usually insulated to minimize heat dissipation, reduce energy consumption and avoid operator burns. Equipped with multiple safety protection devices, such as over-temperature alarm, leakage protection, overload protection, fire and explosion-proof devices, etc., to ensure the safety of the equipment in the operation process and prevent accidents.



参数/Parameters

特点 Feature	普通款 Regular model		高配款 High-end model	
型号 Model	内胆不锈钢 Stainless steel liner	内胆镀锌版 Inner galvanized sheet	内胆不锈钢 Stainless steel liner	内胆镀锌版 Inner galvanized sheet
温度范围 Temperature range	0-200℃	0-200℃	0-200℃	0-200℃
功率(kw) Power	12	12	12	12
产品尺寸(mm) Product Size	1750*950*2180	1750*950*2180	1750*950*2180	1750*950*2180
产品重量(kg) Product Weight	320kg	320kg	320kg	320kg
内胆尺寸(mm) Internal Size	1600*1200*800	1600*1200*800	1600*1200*800	1600*1200*800

应用范围/Scope of Application

用于电子元件的烘干、固化等工艺。也是丝网印刷中网版制作的关键设备之一，用于烘干涂布有感光胶的丝印网版。更是在塑料成型、橡胶硫化等工艺中使用，工业高温烤箱可提供所需的高温环境，使塑料产品定型、橡胶制品硫化，提高产品的质量和性能。

It is used for drying and curing process of electronic components. It is also one of the key equipments for screen making in screen printing, used for drying the screen printing screen coated with photopolymer. More so, it is used in plastic molding, rubber vulcanization and other processes, industrial high-temperature oven can provide the required high-temperature environment, so that the plastic product shaping, rubber products vulcanization, improve the quality and performance of the product.

隧道炉

Tunnel Furnace

内部合理的加热元件布局和循环风系统，使得炉内温度分布较为均匀，物料受热均匀，能够保证产品质量的一致性。可与其他生产设备组成自动化生产线，实现进料、输送、加热、出料等全过程的自动化控制，减少人工干预，降低劳动强度和生产成本。

Reasonable internal layout of heating elements and circulating air system, so that the temperature distribution in the furnace is more uniform, the material is heated evenly, to ensure the consistency of product quality. It can be combined with other production equipment to form an automated production line, realizing automatic control of the whole process of feeding, conveying, heating and discharging, reducing manual intervention, labor intensity and production costs.



40*150矮台/low table



35*110矮台/low table

参数/Parameters

型号 Feature	35*110矮台 35*110 low table	40*150矮台 40*150 low table	40*150高台 40*150 high table
特点 Feature	不锈钢内箱 Stainless steel inner box	镀锌内箱 Galvanized inner box	镀锌内箱 Galvanized inner box
温度范围 Temperature range	0-300°C	0-300°C	0-300°C
功率(kw) Power	5-8	5-8	5-8
炉内长度(cm) Product Size	90	100	100
网带尺寸(cm) Internal Size	35*110	40*150	40*150



40*150高台/high table

应用范围/Scope of Application

广泛应用于电子制造行业、塑料橡胶行业、陶瓷玻璃行业、金属加工行业、化工材料行业等行业。

It is widely used in electronic manufacturing industry, plastic and rubber industry, ceramic and glass industry, metal processing industry, chemical material industry and other industries.

千层架

Kilolayer Rack

放置空间大，操作简便，可有效利用车间或库房空间。物品放置在千层架上，可避免与地面或其他物品直接接触，减少灰尘、污渍和损坏的风险，有助于保证产品的质量和外观。活动式的结构使得操作人员可以轻松地将物品放置在不同层次上，方便取放和整理。同时，也便于对晾干或烘烤过程进行监控和管理，提高生产效率。

Placing space, easy to operate, can effectively use the workshop or warehouse space. The items placed on the shelf can avoid direct contact with the ground or other items, reducing the risk of dust, stains and damage, and helping to ensure the quality and appearance of the products. The movable structure allows the operator to easily place items on different levels for easy access and organization. It also makes it easy to monitor and manage the drying or baking process, improving productivity.



参数/Parameters

型号 Model	10*10	10*10	12*12	12*12	12*12
主架外尺寸(mm) Main frame size	1100*750*1450	1100*750*1450	1100*750*1450	1100*750*1450	1100*750*1450
网片尺寸(mm) Single layer mesh frame size	990*640	990*640	990*640	990*640	990*640
网格尺寸(mm) Mesh Size	100*100	100*100	100*100	100*100	100*100
层数 Number of layers	25	25	50	50	25
间距(mm) Distance	50含线 Contains border lines	50含线 Contains border lines	25含线 Contains border lines	25含线 Contains border lines	50含线 Contains border lines
承重(kg) Weight capacity	2	5-8	2	5-8	15-20
重量(kg) Weight	53	88	34	55	90

应用范围/Scope of Application

广泛应用于丝印厂、转印烫画厂、印刷电路板厂、电子加工厂、饰品厂、鞋厂、皮带皮革厂、防静电器材厂、木器涂装厂、彩绘玻璃、上糊干燥、中大型家具厂、百叶窗帘厂以及溅镀厂等。

Widely used in screen printing factory, transfer hot stamping factory, printed circuit board factory, electronic processing factory, jewelry factory, shoe factory, belt leather factory, anti-static equipment factory, wood coating factory, stained glass, gluing and drying, medium and large-scale furniture factory, blinds and curtains factory, and sputtering and plating factory.

DTF白墨烫画打印机

DTF White Ink Ironing Printer

通过数码打印技术，将图案经计算机处理后，由打印机精确地打印在热转印膜上。色彩精确，打印便捷，DTF 烫画打印无需制版，节省了制版时间和成本。

Through the digital printing technology, the pattern is processed by the computer and then accurately printed on the heat transfer film by the printer. Accurate color, convenient printing, DTF hot stamping printing without plate making, saving the time and cost of plate making.



参数/Parameters

型号 Model	A3
产品尺寸(mm) Product Size	860*600*430
打印尺寸(mm) Screen Size	300*n
打印速度(m/h) Printing speed	3.5-9
产品重量(kg) Product Weight	40
颜色模式 Color Mode	CMYK
接口方式 interface method	USB2.0/3.0 网口RT45 USB2.0/3.0 network port RT45
喷头 Product Size	爱普生 双XP600压电喷头 EPSON Dual XP600 Piezo sprayhead
是否支持卷材打印 Whether to support roll printing	是/yes
功率(w) Power	50

应用范围/Scope of Application

适用范围广，能在多种材质上进行印花，如纯棉、化纤、尼龙、皮革等面料，不受材质限制，可满足不同客户对各种服装及物品的印花需求。可印制各种图案、文字、照片等，满足消费者对于独特服装的需求，如定制情侣装、亲子装、团队服装等。

Wide range of application, can be printed on a variety of materials, such as cotton, chemical fiber, nylon, leather and other fabrics, regardless of the material limitations, to meet the needs of different customers on a variety of clothing and goods printing. Can print various patterns, text, photos, etc., to meet consumer demand for unique clothing, such as customized couples, parent-child clothing, team clothing.

气动小型平面丝印机


Pneumatic Compact Flat Screen Printing Machine

张力计是一种用于测量和监测物体所受张力或拉力的仪器，它可以为生产过程提供准确定量的松紧参数，确保生产过程中张力保持稳定或达到要求的值。体积小、重量轻，便于携带和现场操作。

Tensiometer is an instrument used to measure and monitor the tension or pulling force on an object. It can provide accurate and quantitative tensioning and loosening parameters for the production process to ensure that the tension remains stable or reaches the required value during the production process. Small size and light weight make it easy to carry and operate on site.



DL1051

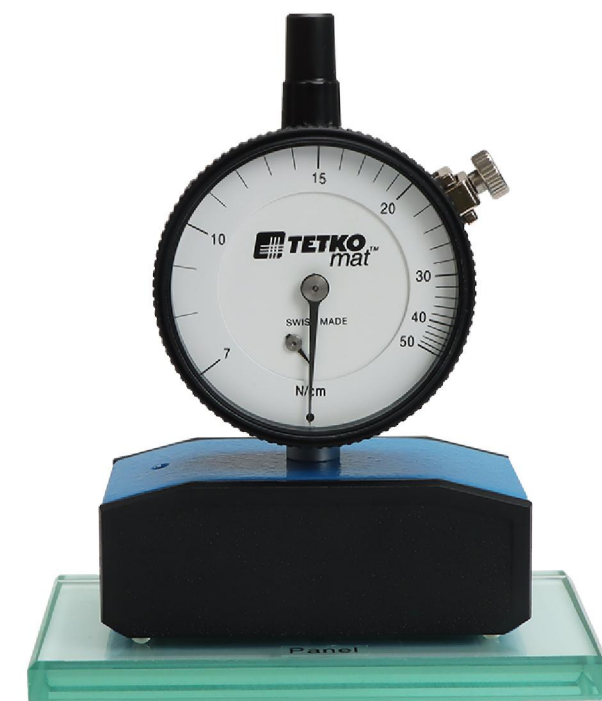

DL1050

参数/Parameters

型号 Model	误差 Error value	张力范围 Tension range	产品重量(kg) Product weight	机器尺寸(mm) Machine Size	包装重量(kg) Package Weight	包装尺寸(mm) Package Size
DL1051	±0.5%	7-80N/CM	750g	95*115*38	1	175*125*75
DL1050	±0.5%	7-50N/CM	500g	108*76*44	1	229*200*76

应用范围/Scope of Application

应用范围广，纺织行业，造纸行业，印刷行业，包装行业，金属加工行业，线缆制造行业，橡胶和塑料行业，电子行业，汽车制造行业，建筑行业等。

Wide range of applications, textile industry, paper industry, printing industry, packaging industry, metal processing industry, cable manufacturing industry, rubber and plastic industry, electronics industry, automotive manufacturing industry, construction industry, etc.

菲林打印机
Film Printer

菲林打印机能够输出高分辨率的图像，满足印刷和制版对精度的要求，确保印刷品的清晰度和细节。可以根据需要随时打印不同内容的菲林，无需像传统制版那样制作大量固定的版材，尤其适合小批量、多样化的生产需求。

The film printer can output high-resolution images to meet the requirements of printing and plate making for accuracy, ensuring the clarity and detail of printed materials. Can print different contents of the film at any time as needed, without the need to make a large number of fixed plates like traditional plate making, especially suitable for small batch and diversified production needs.



参数/Parameters

特点 Feature	升级款 upgraded model		高精度 High-precision model		
型号 Model	A4	A3+	A4	A3+	A3+
打印宽度(mm) Print Width	210	330	210	330	330
打印分辨率 Print resolution	5760-1440dpi	5760-1440dpi	5760-1440dpi	5760-1440dpi	5760-1440dpi
打印精度 Printing Accuracy	0.1mm	0.05mm	0.05mm	0.05mm	0.05mm
能否打印卷材 Ability to print on rolls	否/no	否/no	否/no	否/no	是/yes
接口类型 Interface Type	USB	USB	USB	USB	USB

应用范围/Scope of Application

为胶印、丝印、柔印等印刷方式制作菲林版，广泛应用于书籍、海报、包装等印刷品的制版工作。在纺织印染行业，可将设计好的图案打印到菲林上，再通过制版等工艺将图案转移到布料上。

Produces film plates for offset, silkscreen, flexo and other printing methods, and is widely used in plate making for books, posters, packaging and other printed materials. In the textile printing and dyeing industry, the designed pattern can be printed onto the film, and then the pattern can be transferred to the fabric through plate making and other processes.

菲林桌
Filmstrip Table

一般由坚固的桌面和支撑结构组成，桌面通常采用玻璃或亚克力等透光材料，下方配备均匀分布的光源，如定制 LED 节能灯管，为检测菲林提供稳定、均匀的光线。

Generally consisting of a sturdy tabletop and support structure, the tabletop is usually made of light-transmitting materials such as glass or acrylic, and is equipped with an evenly distributed light source underneath, such as customized LED energy-saving lamps, to provide stable, even light for inspecting the film.



A和B外观相似/A and B appearance is the same

参数/Parameters

特点 Feature	60*120			90*120		
型号 Model	A	B	C	A	B	C
产品尺寸(mm) Print Width	1200*600*850	1200*600*850	1200*600*850	1200*900*850	1200*900*850	1200*900*850
玻璃台面尺寸(mm) Print resolution	1116*516	1116*516	1116*516	1116*816	1116*816	1116*816
玻璃台面厚度(mm) Printing Accuracy	6	6	6	6	6	6
是否带抽屉 Ability to print on rolls	是/yes	是/yes	否/no	是/yes	是/yes	否/no
是否可调节支脚 Interface Type	是/yes	否/no	否/no	是/yes	否/no	否/no

应用范围/Scope of Application


主要用于检测菲林底片的质量，包括检查菲林上的图形、线条是否清晰完整，有无划痕、污渍、曝光过度或不足等缺陷。在印刷电路板制造、丝网印刷等行业中广泛应用，帮助工作人员在制版前及时发现菲林问题，避免因菲林缺陷导致的产品质量问题。

It is mainly used for testing the quality of film negatives, including checking whether the graphics and lines on the film are clear and complete, and whether there are scratches, stains, overexposure or underexposure and other defects. It is widely used in printed circuit board manufacturing, screen printing and other industries to help the staff find the film problems in time before plate making and avoid product quality problems caused by film defects.

拉网机
Screen Puller

拉网机又称绷网机，是一种用于将丝网绷紧并固定在网框上的设备。作为整个拉网机的支撑结构，通常采用金属材料制成，具有足够的强度和稳定性，以保证在拉网过程中机器不会发生变形或晃动。

Wire mesh pulling machine, also known as wire mesh tensioning machine, is a kind of equipment used to tauten and fix the wire mesh on the mesh frame. As the support structure of the whole screen pulling machine, it is usually made of metal material with sufficient strength and stability to ensure that the machine will not be deformed or shaken during the process of screen pulling.

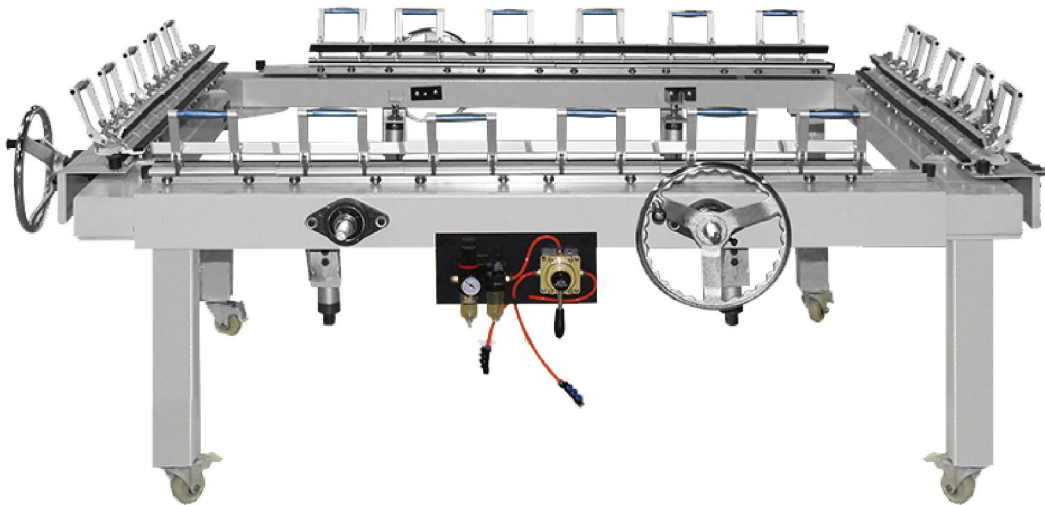

参数/Parameters

型号 Model	90*120				120*150			
张力 Surface tension	>30N/CM	>30N/CM	>30N/CM	>30N/CM	>30N/CM	>30N/CM	>30N/CM	>30N/CM
产品重量(kg) Product weight	280kg	280kg	280kg	280kg	360kg	360kg	360kg	360kg
最大绷网尺寸(mm) Max. Screen size	900*1200	900*1200	900*1200	900*1200	1200*1500	1200*1500	1200*1500	1200*1500
机器内空尺寸(mm) Machine hollow size	900*1200	900*1200	900*1200	900*1200	1200*1500	1200*1500	1200*1500	1200*1500
拉网方式 Mode of pulling the net	机械拉网 Mechanical net pulling	机械拉网 Mechanical net pulling	蜗轮蜗杆拉网 Worm Gear Puller	蜗轮蜗杆拉网 Worm Gear Puller	机械拉网 Mechanical net pulling	机械拉网 Mechanical net pulling	蜗轮蜗杆拉网 Worm Gear Puller	蜗轮蜗杆拉网 Worm Gear Puller
是否带气动装置 With or without pneumatic device	是/yes	是/yes	是/yes	是/yes	是/yes	是/yes	是/yes	是/yes
拉网夹头 Collet	单夹 single clip	双铝夹 double aluminum clip	单夹 single clip	双铝夹 double aluminum clip	单夹 single clip	双铝夹 double aluminum clip	单夹 single clip	双铝夹 double aluminum clip

应用范围/Scope of Application

在纺织品、塑料、金属、玻璃等材质的印刷中，拉网机用于制作印刷网版。或是用于制造各种过滤筛网，如空气过滤器、液体过滤器等，通过拉网机将滤网材料绷紧并固定在框架上，提高过滤效率和精度。

In the printing of textiles, plastics, metals, glass and other materials, screen pulling machines are used to make printing screens. Or it is used to make all kinds of filtration screens, such as air filters, liquid filters, etc. The screen material is tensed and fixed on the frame by the screen pulling machine to improve the filtration efficiency and precision.

冲版台
Punching Table

多采用不锈钢板制作，具有耐腐蚀、耐磨损、易清洁的特点，能够承受长期的水流冲刷和化学药剂的侵蚀。配备日光灯，可在冲洗过程中对版材进行透视照明，确保显影效果达到最佳。

Mostly made of stainless steel plate, it is corrosion-resistant, abrasion-resistant and easy to clean, and can withstand long-term water flushing and chemical erosion. Equipped with fluorescent lamps, the plates can be illuminated during the washing process to ensure that the development effect is optimized.



90*120
不带背光灯/Without backlight



90*120
带背光灯/With backlight

参数/Parameters

型号 Model	90*120	90*120	120*150	120*150
产品尺寸(cm) Product size	126*80*166	126*80*166	130*110*180	130*110*180
清洁面积(cm) vacuum pumps	90*120	90*120	120*150	120*150
产品重量(kg) Glass thickness	150	150	170	170
是否带背光灯 Iron plate thickness	是/yes	否/no	是/yes	否/no
材质 Voltage	不锈钢 Stainless steels	不锈钢 Stainless steels	不锈钢 Stainless steels	不锈钢 Stainless steels
功率(kw) Power	1.5	1.5	1.5	1.5

应用范围/Scope of Application

主要应用于丝网印刷行业，在制作丝网印版时，对曝光后的丝网版进行冲洗显影，此外，也可适用于其他印刷制版工艺中需要进行冲洗显影的版材，如一些小型的平版印刷版材等。

Mainly used in the screen printing industry, in the production of screen printing plate, the exposure of the screen plate for the development of washing, in addition, can also be applied to other printing plate making process needs to be developed in the washing of the plate, such as some small lithographic printing plate.

碘 镓灯真空晒版机
Gallium Iodide Lamp Vacuum Platesetter

采用碘镓灯作为光源，具有发光效率高、光谱分布与多数印版感光材料特性相匹配等优点。晒版精度高，真空吸附功能使版材与原版紧密贴合。多配备微电脑控制系统，可预设曝光时间、真空抽气时间等参数，实现自动化操作，降低了操作人员的劳动强度和对操作技能的要求。

The use of gallium iodide lamps as a light source has the advantages of high luminous efficiency, spectral distribution and most of the characteristics of the plate photographic materials match. High precision of sunning plate, vacuum adsorption function makes the plate closely fit with the original plate. More equipped with microcomputer control system, can be preset exposure time, vacuum pumping time and other parameters, to achieve automated operation, reducing the operator's labor intensity and requirements for operating skills.



70*90
常规版/Regular version



70*90
微电脑版/Microcomputer



90*120
分体微电脑版/Split microcomputer



90*120
LED微电脑版/LED microcomputer



90*120
平行光微电脑版
Parallel light microcomputer

参数/Parameters

型号 Model	产品尺寸(cm) Product size	晒版面积(cm) Plate burning size	产品重量(kg) Product weight	电压(v) Voltage	功率(kw) Power	玻璃厚度(cm) Glass thickness	铁板厚度(cm) Iron plate thickness	真空泵 Vacuum pumps
常规版(70*90) regular version	70*90*94	50*70	100	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
常规版(90*120) regular version	90*120*94	70*100	140	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
常规版(120*150) regular version	120*150*94	100*130	180	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
微电脑(70*90) microcomputer	70*90*94	50*70	100	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
微电脑(90*120) microcomputer	90*120*94	70*100	140	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
微电脑(120*150) microcomputer	120*150*94	100*130	180	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
分体微电脑版(90*120) Split microcomputer	90*120*94	70*100	140	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
分体微电脑版(120*150) Split microcomputer	120*150*94	100*130	180	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
LED微电脑版(90*120) LED microcomputer	90*120*94	70*100	140	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
LED微电脑版(120*150) LED microcomputer	120*150*94	100*130	180	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
平行光微电脑版(90*120) Parallel light microcomputer	90*120*94	70*100	140	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L
平行光微电脑版(120*150) Parallel light microcomputer	120*150*94	100*130	180	220/380	1kw/2kw	0.8	0.12	无油1.5L Oil-free 1.5L

应用范围/Scope of Application

广泛应用于各种印刷领域，如商业印刷、包装印刷、标签印刷、丝网印刷等，适用于制作 PS 版、CTP 版、丝网版等多种版材。由于晒版精度高，能制作出高质量的印版。

Widely used in a variety of printing fields, such as commercial printing, packaging printing, label printing, screen printing, etc. It is suitable for making PS plate, CTP plate, screen plate and other kinds of plates. Due to the high precision of the solarization, it can produce high quality printing plates.

精密真空晒版机

Precision Vacuum Plate Making Machine


能够实现极高的晒版精度，对于网点、线条等细节的还原能力强，确保印刷品的图像质量细腻、清晰，在艺术品复制、高档画册制作等对印刷品质要求苛刻的领域表现出色。无论是真空吸附效果还是曝光的均匀性和准确性，都具有较高的稳定性。在连续生产过程中，能够保持一致的晒版质量。

It is able to realize a very high degree of printing accuracy, and has a strong ability to restore details such as dots and lines, ensuring that the image quality of the printed matter is delicate and clear, and excels in the fields of art reproduction, high-grade album production and other areas with demanding requirements for printing quality. Both the vacuum adsorption effect and the uniformity and accuracy of exposure have high stability. In the continuous production process, it can maintain a consistent quality of the solarization plate.



参数/Parameters

型号 Model	90*120	1200*1500	1400*1700
产品尺寸(cm) Product size	90*120*104	120*150*104	140*170*104
真空泵 vacuum pumps	无油1.5L Oil-free 1.5L	无油1.5L Oil-free 1.5L	无油1.5L Oil-free 1.5L
玻璃厚度(cm) Glass thickness	0.8	0.8	0.8
铁板厚度(cm) Iron plate thickness	0.12	0.12	0.12
电压 Voltage	220V/380V	220V/380V	220V/380V
功率 Power	1kw/2kw	1kw/2kw	1kw/2kw
是否有真空表 With/without vacuum gauge	是/yes	是/yes	是/yes

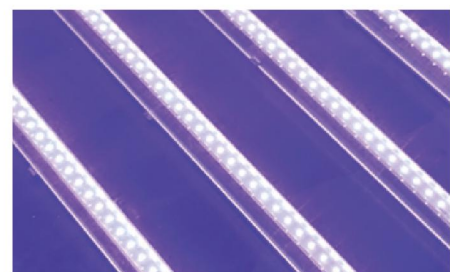

应用范围/Scope of Application

可用于多种类型的版材晒制，如 PS 版、CTP 版、丝网版等，满足不同印刷工艺的需求，包括胶印、丝网印刷等。广泛应用于商业印刷、艺术印刷、包装印刷、标签印刷等领域。

It can be used for many types of plate tanning, such as PS plate, CTP plate, screen plate, etc., to meet the needs of different printing processes, including offset printing and screen printing. Widely used in commercial printing, art printing, packaging printing, label printing and other fields.

紫外线丝印晒版机

Ultraviolet Screen Printing Platesetter

小型晒版机占地面积小，便于安置在空间有限的场所。设计较为简单，易于上手。重氮冷光源紫外线晒版灯管作为晒版光源，采用数显时间继电器控制时间。具有操作简单，结构合理、延时范围宽、晒版精度高、功耗低寿命长等优点。

The small footprint of the compact plate dryer makes it easy to place in locations where space is limited. The design is relatively simple and easy to start. The diazo cold light source ultraviolet tanning lamp as the light source of the tanning plate, the use of digital time relay control time. It has the advantages of simple operation, reasonable structure, wide range of time delay, high accuracy of plate tanning, low power consumption and long service life.



参数/Parameters

型号 Model	DLO-4560
产品尺寸(cm) Product size	76*52*17
保险丝 Fuse	1+1(备用) 1+1 (alternate)
玻璃厚度(cm) Glass thickness	0.8
铁板厚度(cm) Iron plate thickness	0.12
电压 Voltage	220V/380V
功率 Power	1kw/2kw

应用范围/Scope of Application

可用于制作多种类型的印版，如丝网印刷版、标牌、钢板、PS 版的晒制等，能满足不同印刷工艺和产品的制版需求，例如可用于制作广告宣传品、海报、名片、纺织品印花、包装印刷等方面的印版。

It can be used to make many types of printing plates, such as screen printing plates, signs, steel plates, PS plate tanning, etc. It can meet the plate making needs of different printing processes and products, for example, it can be used to make plates for advertising materials, posters, business cards, textile printing, package printing and so on.

高压水枪

High Pressure Water Pistol

将普通的水加压到几十甚至几百个大气压，然后通过特制的高压喷嘴将水喷射出去，形成高速、高压的水流。这种高压水流具有强大的冲击力，能够有效去除物体表面的污垢、泥沙、油污等杂质。

Ordinary water is pressurized to dozens or even hundreds of atmospheres, and then the water is ejected through a special high-pressure nozzle to form a high-speed, high-pressure water stream. This high-pressure water flow has a strong impact, can effectively remove the object surface dirt, mud, oil and other impurities



T5-1

参数/Parameters

型号 Model	T5-1
水压(kg) Product size	10-30
适合水管内径(mm) vacuum pumps	11-12 14-15 16-18
材质 Glass thickness	合金+铜 Alloy + Copper
水花类型 Types of Splashes	雾状/水柱 Mist/Water Column

应用范围/Scope of Application

应用广泛于丝网印刷制版，也可用于清洗各种工业设备、能用于建筑物外墙的清洗，去除墙面的污垢、涂料残留等、也可用于清洗汽车、船舶、飞机等交通工具的外壳和零部件，去除油污、灰尘等。

Widely used in screen printing plate, can also be used to clean all kinds of industrial equipment, can be used for building wall cleaning, remove wall dirt, paint residue, etc., can also be used to clean the shell and parts of automobiles, ships, airplanes and other means of transportation, to remove grease, dust and so on.

热风枪

Heat Gun

温度控制系统可根据设定的温度值，通过调节发热元件的功率等方式，精确控制吹出热风的温度，以满足不同的使用需求。温度调节范围一般在几十摄氏度到几百摄氏度之间，以适应不同材料和工艺的要求。

The temperature control system can accurately control the temperature of the hot air blown out according to the set temperature value by adjusting the power of the heating element, etc., to meet different needs of use. The temperature adjustment range is generally between tens of degrees Celsius and hundreds of degrees Celsius to meet the requirements of different materials and processes.



参数/Parameters

型号 Model	QR-866A	QR-866B	QR-866
类型(cm) Product size	两档数显无级调温 Two models digital display, stepless temperature control	两档无级调温 Two models, stepless temperature control	两档按键调温数显 Two speeds, key to adjust the temperature, digital display
工作温度(°C) vacuum pumps	60-600°C	60-600°C	60-600°C
空气流量(L) Glass thickness	300-500	300-500	300-500
电压(V) Iron plate thickness	220	220	220
电流(A) Voltage	7.5	7.5	7.5
功率(W) Power	2000	2000	2000
噪音分贝(dB) With/without vacuum gauge	50-60	50-60	50-60

应用范围/Scope of Application

应用广泛，可用于拆卸和焊接电子元件。也可用于塑料管材、板材的焊接、热成型等。还可用于汽车玻璃贴膜，排除气泡。在制作玻璃工艺品、陶瓷工艺品等时，热风枪可用于对材料进行局部加热、塑形、固化等处理。

Wide range of applications, can be used for disassembling and welding electronic components. It can also be used for welding and thermoforming of plastic pipes and plates. It can also be used for automotive glass lamination to eliminate air bubbles. In the production of glass crafts, ceramic crafts, etc., the hot air gun can be used for local heating, molding, curing and other processing of the material.

裁切机

Cutting Machine



参数/Parameters

型号 Model	DL330(12")	DL630(24")	DL1200(48")	DL1500(59")
款式 Features	3600-4800	1800-2400	3600-4800	1800-2400
最大进料宽度(mm) Max. feed width	180*450	180*450	180*450	180*450
最大切割宽度(mm) Max. cutting width	110	110	110	110
机器尺寸(mm) Machine Size	8/12	8/12	8/12	8/12
机器重量(kg) Weight	AC220	AC220	AC220	AC220
最大切割速度 Max. Cutting Speed	650mm/s	650mm/s	650mm/s	650mm/s
切割力 Cutting Force	0-500g/0-1000g	0-500g/0-1000g	0-500g/0-1000g	0-500g/0-1000g
机械精度(mm) Mechanical	0.05	0.05	0.05	0.05
可重复精度(mm) Repeatable	<±0.1mm	<±0.1mm	<±0.1mm	<±0.1mm
工作噪音(mm) Noise at Work	≤ 55DB	≤ 55DB	≤ 55DB	≤ 55DB
电压 Voltage	AC110V /220V	AC110V /220V	AC110V /220V	AC110V /220V
绘图仪指令 Plotter Instruction	Dm-pl/hp-gl自动识别 DM-PL/HP-GL Automatic Identification			
接口 Interfaces	USB/串行端口/U盘端口 USB/Serial port /U-Disc port			
软件 Software	coreldraw/signmaster的插件 Plugin for coreldraw/signmaster			

应用范围/Scope of Application

广泛应用于印刷包装行业，裁切纸张、纸板、塑料薄膜、不干胶等材料。服装纺织行业：或用于裁剪各种布料，将布料裁剪成不同的形状和大小。也用于广告制作行业：裁切广告材料，如亚克力板、PVC 板、喷绘布、写真纸等。

Widely used in printing and packaging industry, cutting paper, cardboard, plastic film, self-adhesive and other materials. Clothing and textile industry: or used to cut all kinds of fabrics, cut the fabric into different shapes and sizes. Also used in advertising production industry: cutting advertising materials, such as acrylic board, PVC board, spray painting cloth, photographic paper, and so on.

油墨搅拌机

Ink Mixer

相比人工搅拌，油墨搅拌机能够在短时间内实现油墨的均匀混合，大大提高了生产效率。通过精确控制搅拌速度、时间和温度等参数，能够确保油墨的混合质量，提高印刷品的质量。

Compared with manual mixing, the ink mixer can realize the uniform mixing of ink in a short time, which greatly improves the production efficiency. By precisely controlling parameters such as mixing speed, time and temperature, it can ensure the mixing quality of ink and improve the quality of printed materials.



参数/Parameters

型号 Model	产品重量(kg) Product weight	转速(rpm) Speed	搅拌容量(L) Mixing Capacity	电压(V) Voltage	时间控制(min) Time control	产品尺寸(mm) Product Size
DL-FB-105	16	0-150	1-5	220	0-60	320*230*600

应用范围/Scope of Application

可以搅拌各种类型的油墨，包括水性油墨、油性油墨、UV 油墨等，还可以用于搅拌其他黏稠性物质，如涂料、胶水等。

It can be used to mix various types of inks, including water-based inks, oil-based inks, UV inks, etc. It can also be used to mix other viscous substances, such as paints and glues.

UV平曲两用固化机

UV Flat Surface Curved Surface Dual-Purpose Curing Machine

UV 平面曲面两用固化机是一种用于固化 UV 油墨、胶水、涂料等材料的设备，它可以同时处理平面和曲面的物体，具有高效、节能、环保等优点。

UV flat and curved surface dual-purpose curing machine is a kind of equipment used for curing UV inks, glues, coatings and other materials, which can simultaneously deal with flat and curved surfaces of the object, with high efficiency, energy saving, environmental protection and so on.



参数/Parameters

型号 Model	DL4024
排风机功率(W) Exhaust fan power	370
灯管照射宽度(mm) Lamp Irradiation Width	620
波峰值(nm) Peak wave value	365
预热时间(mm) Preheating time	约3分钟 Approx. 3 min.
灯管寿命 Lamp Life	平均1000小时 Average 1000 hours
传送电机(w) Conveyor motor	120
转动速度 Rotation speed	1-5m/min.
治具 Fixture	圆锥治具23个 Cone Jig 23 pcs
电压(v) Voltage	380
产品重量(kg) Product weight	220
总功率(kw) Total power	7.6

应用范围/Scope of Application

应用广泛，如印刷品的 UV 油墨固化，包装材料的 UV 胶水固化，用于电子元器件的 UV 涂料固化，汽车零部件的 UV 涂料固化，用于家具表面的 UV 涂料固化等。

Wide range of applications, such as UV ink curing for printed materials, UV glue curing for packaging materials, UV paint curing for electronic components, UV paint curing for automotive parts, UV paint curing for furniture surfaces, etc.

UV平面固化机

UV Flat Surface Curing Machine

UV 平面固化机可以使 UV 涂料在瞬间干燥固化，从而提高生产效率和产品质量。可一次性完成五面固化，干燥速度快，更能保证油漆固化效果，提高效率，同时漆面更加的平整光滑。

UV flat curing machine can make UV coating dry and curing in an instant, so as to improve production efficiency and product quality. Can be completed at once five curing, drying speed, more to ensure that the paint curing effect, improve efficiency, at the same time the paint surface is more flat and smooth.



参数/Parameters

型号 Model	DL6020
排风机功率(W) Exhaust fan power	370
灯管照射宽度(mm) Lamp Irradiation Width	900
波峰值(nm) Peak wave value	365
网带规格(mm) Mesh Belt Specifications	600*2000
进料口(mm) Feed opening	550
出料口(mm) Outlet	550
输送速度 Conveying speed	0-8m/min.
照射距离(mm) Irradiation distance	50-150
传送带材质 Conveyor material	特氟龙 Teflon
产品尺寸(mm) Product Size	830*2000*1150

应用范围/Scope of Application

应用广泛，如印刷品的 UV 油墨固化，包装材料的 UV 胶水固化，用于电子元器件的 UV 涂料固化，汽车零部件的 UV 涂料固化，用于家具表面的 UV 涂料固化等。

Wide range of applications, such as UV ink curing for printed materials, UV glue curing for packaging materials, UV paint curing for electronic components, UV paint curing for automotive parts, UV paint curing for furniture surfaces, etc.