

半

自动高精密丝印机

Semi-automatic high precision screen printing machine

此款丝印机，做工精细，实用性强，性价比高。综合性微调装置，适应不同的印刷需求。可选吸气真空台面。精磨高强度工作台，均布吸气孔，强力真空吸附，保证多色套色准确。工作台可进行左右及平面摆角微调，印刷精度高，调校方便。自动平衡刮刀，可保证印刷压力均衡；气动抬刀功能，省时高效。

This screen printing machine, fine workmanship, practical and cost-effective. Comprehensive micro-adjustment device to adapt to different printing needs. Optional suction vacuum table. Precision grinding and high hardness worktable, evenly distributed suction holes, strong vacuum adsorption, to ensure the accuracy of multi-color registration. The working table can be fine-tuned for left, right and plane swing angle, with high printing precision and easy adjustment. Automatic balancing squeegee ensures equalized printing pressure; pneumatic knife lifting function saves time and efficiency.



4060PN/V



3050PN/V



4060HN/V



3050HPN/V

半

自动高精密丝印机

Flat Manual Screen Printing Table

型号 Model	4060PN	4060PV	3050PN	3050PV	4060HN	4060HV	3050HPN	3050HPV
台面尺寸(mm) Countertop Size	400*600	400*600	300*500	300*500	400*600	400*600	300*500	300*500
台面特点 Countertop Features	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum	无吸气 no vacuum	吸气 vacuum
最大印刷面积(mm) Max. printing area	350*550	350*550	280*400	280*400	350*550	350*550	250*350	250*350
最大印刷高度(mm) Max. print height	80	80	80	80	80	80	80	80
功率(w) Power	40	40	40	40	40	40	40	40
气压(bar) Pressure	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
印刷速度(次/时) Printing speed (Pcs/h)	1200	1200	1200	1200	1200	1200	1200	1200
最大网框外径(mm) Max. frame outer diameter	500*800	500*800	400*600	400*600	500*800	500*800	400*550	400*550
驱动方式 Driving method	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic	气动 Pneumatic
产品尺寸(mm) Product Size	850*980*1040	850*980*1040	740*800*1130	740*800*1130	960*880*1650	960*880*1650	750*750*1600	750*750*1600
重量(kg) Product weight	180	180	120	120	250	250	180	180

型号介绍：N：普通不锈钢工作台；V：真空吸气式工作台；H:立式
Model introduction: N: ordinary stainless steel worktable; V: vacuum suction type worktable; H: vertical type



应用范围/Scope of Application

适用于各种平面材料，应用范围广，如海报印刷、标识制作、T 恤印花、纸盒印刷、陶瓷工艺品印刷等。


It is suitable for all kinds of flat materials and has a wide range of applications, such as poster printing, logo making, T-shirt printing, carton printing, ceramic handicrafts printing, etc.

气动小型平面丝印机

Pneumatic Compact Flat Screen Printing Machine

气动平面丝印机，通过气动元件控制网版的上下运动。在印刷过程中，网版能够按照预设的程序自动与承印物接触和分离，提高了印刷的效率和准确性。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

Pneumatic flat screen printing machine, the up and down movement of the screen plate is controlled by pneumatic components. During the printing process, the screen plate can automatically contact and separate from the substrate according to the preset program, which improves the efficiency and accuracy of printing. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.

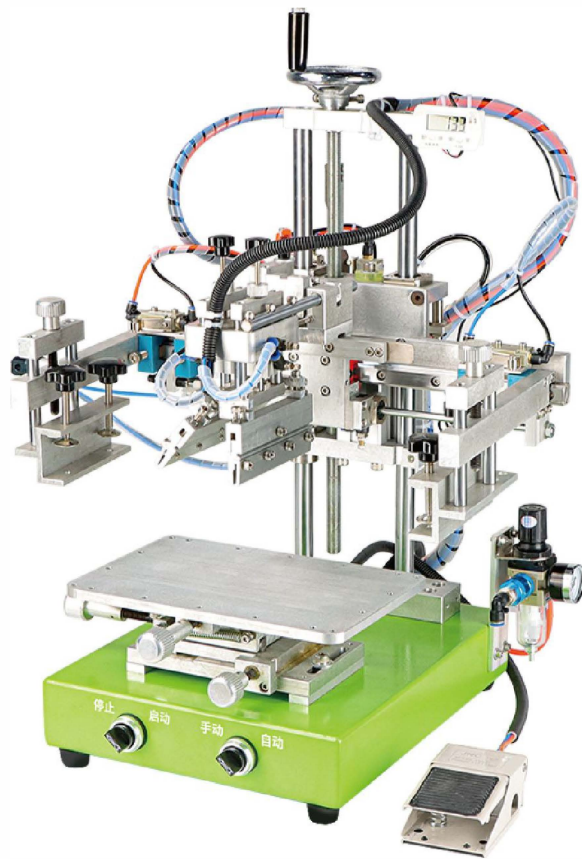

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	印刷高度(mm) Printing height	最大网版尺寸(mm) Max. Screen Size	最大印刷面积(mm) Max. Print Area	产品重量(kg) Product weight	产品尺寸(mm) Product Size	气压(bar) Pressure
D709	200*300	120	300*450	180*250	32	500*600*650	5.5

应用范围/Scope of Application

广泛应用于广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业。利用其印刷速度调节方便的特点，可以快速完成大量的印刷任务。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。

Widely used in advertising industry, electronics industry, packaging industry, textile industry, glass and ceramics industry. Utilizing its easy adjustment of printing speed, it can quickly complete a large number of printing tasks. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the aesthetics.

台式平面半自动丝印机

Tabletop Flat Semiautomatic Screen Printing Machine

该款气动平面丝印机，可选真空工作台面，真空工作台面吸气功能通过产生负压，将印刷品紧紧吸附在工作台上，从而有效地防止印刷品在印刷过程中的移位和变形，确保印刷精度。通过气动元件控制。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

This pneumatic flat screen printing machine, optional vacuum worktable, vacuum worktable suction function by generating negative pressure, the prints will be tightly adsorbed on the worktable, so as to effectively prevent the prints from shifting and deformation during the printing process, to ensure the printing accuracy. Controlled by pneumatic components. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.



3050



4060

参数/Parameters

型号 Model	3050	4060	型号 Model	3050	4060
台面 Countertop	实心铸铝台面 Solid Cast Aluminum Countertop	不锈钢台面 Stainless Steel Countertop	印刷速度(次/时) Printing speed (Pcs/h)	1200	1200
台面特点 Countertop Features	吸气/无吸气 Vacuum/no vacuum	吸气/无吸气 Vacuum/no vacuum	网版尺寸(mm) Screen size	400*650	500*750
最大印刷面积(mm) Max. printing area	250*350	350*500	工作台面面积(mm) Worktop area	300*500	400*600
最大印刷高度(mm) Max. print height	100	100	产品尺寸(mm) Product Size	750*620*1100	850*750*1100
左右行程(mm) Left Right Itinerary	400	500	产品重量(kg) Product weight	90	100
上下行程(mm) Up down Itinerary	125	125	气压(bar) Pressure	5-7	5-7

应用范围/Scope of Application

广泛应用于各大行业，例如广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业等。能够很好地还原设计稿中的色彩。其印刷速度调节方便的特点，可以快速完成大量的印刷任务。能满足不同的印刷要求。


It is widely used in major industries, such as advertising, electronics, packaging, textile, glass and ceramics. It is able to restore the colors in the design manuscript very well. Its printing speed is easy to adjust the characteristics, can quickly complete a large number of printing tasks. It can meet different printing requirements.

式平面半自动丝印机


Vertical Flat Semi-automatic Screen Printing Machine

该款气动平面丝印机，可选真空工作台面，真空工作台面吸气功能通过产生负压，将印刷品紧紧吸附在工作台上，从而有效地防止印刷品在印刷过程中的移位和变形，确保印刷精度。通过气动元件控制。印刷力度更均匀，能够根据不同的印刷材料、油墨性质和图案要求，灵活调整印刷速度。

This pneumatic flat screen printing machine, optional vacuum worktable, vacuum worktable suction function by generating negative pressure, the prints will be tightly adsorbed on the worktable, so as to effectively prevent the prints from shifting and deformation during the printing process, to ensure the printing accuracy. Controlled by pneumatic components. The printing strength is more even, and the printing speed can be flexibly adjusted according to different printing materials, ink properties and pattern requirements.

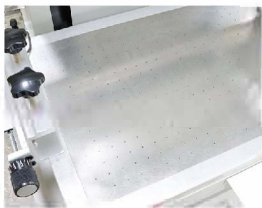

吸气工作台面
Vacuum Worktop

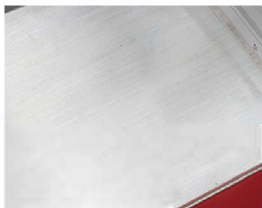

无吸气工作台面
No Vacuum Worktop

参数/Parameters

型号 Model	3050	4060	型号 Model	3050	4060
台面 Countertop	实心铸铝台面 Solid Cast Aluminum Countertop	不锈钢台面 Stainless Steel Countertop	印刷速度(次/时) Printing speed (Pcs/h)	1200	1200
台面特点 Countertop Features	吸气/无吸气 Vacuum/no vacuum	吸气/无吸气 Vacuum/no vacuum	网版尺寸(mm) Screen size	400*650	500*750
最大印刷面积(mm) Max. printing area	250*350	350*500	工作台面积(mm) Worktop area	300*500	400*600
最大印刷高度(mm) Max. print height	100	100	产品尺寸(mm) Product Size	750*620*1550	850*750*1550
左右行程(mm) Left Right Itinerary	400	500	产品重量(kg) Product weight	110	130
上下行程(mm) Up down Itinerary	125	125	气压(bar) Pressure	5-7	5-7

应用范围/Scope of Application

广泛应用于各大行业，例如广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业等。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。其印刷速度调节方便的特点，能满足不同的印刷要求

It is widely used in major industries, such as advertising, electronics, packaging, textile, glass and ceramics. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the

小型摇臂式半自动丝印机

Compact Rocker Type Semi-Automatic Screen Printing Machine

整体体积较小、重量较轻，易于搬运和安置，适合在空间有限的场所使用。极简式机械结构，操作简单，调节方便，易于上手，降低了人工成本和培训成本。由于其小型化和摇臂结构的特点，设备能够适应不同形状、尺寸和材质的平面承印物，通过调整夹具和网版的位置，可以轻松实现多种产品的印刷，提高了设备的通用性和利用率。

Smaller overall volume and lighter weight, easy to carry and place, suitable for use in places with limited space. The minimalist mechanical structure is simple to operate, easy to adjust and easy to start, reducing labor and training costs. Due to its miniaturization and rocker arm structure, the equipment is able to adapt to flat substrates of different shapes, sizes and materials. By adjusting the position of the fixture and screen, it is easy to print a variety of products, which improves the versatility and utilization of the equipment.

参数/Parameters


型号 Model	D710
台面尺寸(mm) Countertop Size	120*200
最大网版尺寸(mm) Max. Screen Size	300*400
产品尺寸(mm) Product Size	740*600*280
产品重量(kg) Product Weight	35
印刷面积(mm) Printing Area	150*200
气压(bar) Pressure	4-6
包装尺寸(mm) Package Size	300*700*700
最大可夹网版厚度(mm) Max. Screen Thickness	50



应用范围/Scope of Application

广泛应用于广告行业、电子行业、包装行业、纺织行业、玻璃和陶瓷行业。利用其印刷速度调节方便的特点，可以快速完成大量的印刷任务。通过其均匀的印刷压力，可以确保油墨在印刷物表面均匀附着，提高美观度。

Widely used in advertising industry, electronics industry, packaging industry, textile industry, glass and ceramics industry. Utilizing its easy adjustment of printing speed, it can quickly complete a large number of printing tasks. Through its uniform printing pressure, it can ensure that the ink adheres evenly on the surface of the printed matter and improve the aesthetics.

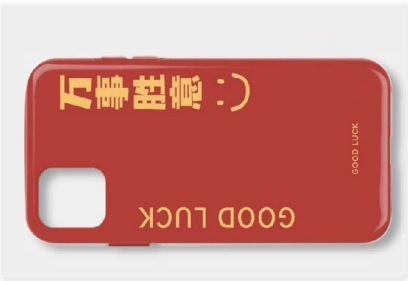

全

自动圆盘丝印机

Automatic Disc Screen Printing Machine

全钢架底座，稳定坚固耐用。全自动印刷，提高生产效率。每个颜色可单独打印。可自动调节印刷高度，定位机构设计合理，套位精准。（1080自带两个烘干机）

Full steel frame base, stable and sturdy. Fully automatic printing to improve productivity. Each color can be printed separately. Printing height can be adjusted automatically, the positioning mechanism is well designed, and the register is accurate. (1080 comes with two dryers)



DL1080



DL2080

参数/Parameters

型号 Model	台面尺寸(mm) Worktop Size	颜色/工位 Color/Station	最大网版尺寸(mm) Max. Screen Size	产品直径(mm) Machine diameter	功率(kw) Power	产品重量(kg) Product weight	气压规格(Mpa) Air pressure specifications
DL1080	230*250	1色/8工位 1Color/8Station	300*400	1980	2.1	380	0.6
DL2080	450*600	2色/8工位 2Color/8Station	500*700	2700	1.2	880	0.6

应用范围/Scope of Application

常用于 T 恤、卫衣、等各类服装的图案印刷，或是床单、被罩、窗帘等家纺产品的印花，能为家纺产品增添丰富精美的图案。在皮革制品上印制各种花纹、商标等。

Commonly used in T-shirts, sweatshirts, and other types of clothing pattern printing, or sheets, covers, curtains and other home textile products, printing, home textile products can add rich and exquisite patterns. Printing various patterns and trademarks on leather products.

球丝印机

Balloon Screen Printing Machine

气球丝印机是一种专门用在气球表面印刷图案、文字或标志的设备。生产速度快，能够满足大批量生产的需求，提高生产效率，降低生产成本。操作简单易懂，工人经过简单培训即可熟练操作，减少了人工操作的难度和劳动强度。

Balloon screen printing machine is a kind of equipment specially used to print patterns, words or logos on the surface of balloons. The production speed is fast, which can meet the demand of mass production, improve the production efficiency and reduce the production cost. The operation is simple and easy to understand, workers can be skilled after simple training, reducing the difficulty of manual operation and labor intensity.



型号 Model	DL001
产品重量(kg) Product weight	80
产品尺寸(mm) Product size	1090*590*1390
打印台尺寸(mm) Printing table size	200*200
最大打印面积(mm) Max. printing area	150*150
最快打印速度(Pcs/h) Fastest printing speed	1500
电压(v) Voltage	220
功率(w) Power	100
印刷行程(mm) Printing trips	240
最大屏幕尺寸(mm) Max. Screen Size	400*300
网版厚度范围(mm) Screen thickness range	20~30
网版微调范围(mm) Stencil fine-tuning range	±10

应用范围/Scope of Application

应用广泛，可以在各种材质的气球上进行印刷，如乳胶气球、橡胶气球、铝膜气球等，还可以印刷不同形状和尺寸的气球，如圆形、心形、椭圆形等。

Widely used, it can be printed on balloons made of various materials, such as latex balloons, rubber balloons, aluminum film balloons, etc. It can also be printed on balloons of different shapes and sizes, such as round, heart, oval and so on.

旋 钮式半自动丝印机

Knob Type Semi-automatic Screen Printing Machine

小型平面丝印机，小幅面积丝网印刷机，外形小巧，运行速度快，性能稳定，广泛应用于电子、五金、塑胶、镜片、玻璃、玩具、办公及学习文具用品、PVC胶片，纸张，PVC化妆品、等等产品表面商标印刷。

Small plane screen printing machine, small area screen printing machine, small appearance, fast running speed, stable performance, widely used in electronics, hardware, plastic, lenses, glass, toys, office and learning stationery, PVC film, paper, PVC cosmetics, and so on the surface of the product trademark printing.



D711

参数/Parameters


型号 Model	D711
台面尺寸(mm) Worktop Size	上层台面/upper worktop: 200*80 底层台面/demersal worktop: 200*200
丝印面积(mm) Screen Printing Area	120*160
最大网版尺寸(mm) Max. Screen Size	300*400
产品尺寸(mm) Product Size	750*450*680
产品重量(kg) Product Weight	40
驱动方式 Driving Method	气动 Pneumatic

气 动圆瓶丝印机

Pneumatic Round Bottle Screen Printing Machine

参数/Parameters

型号 Model	S100
网版尺寸(mm) Screen Size	250*400
印刷行程(mm) Printing Trips	130
圆瓶直径(mm) Round Bottle Diameter	10-100
气压(bar) Pressure	5.5
产品尺寸(mm) Product Size	450*500*650
产品重量(kg) Product Weight	34

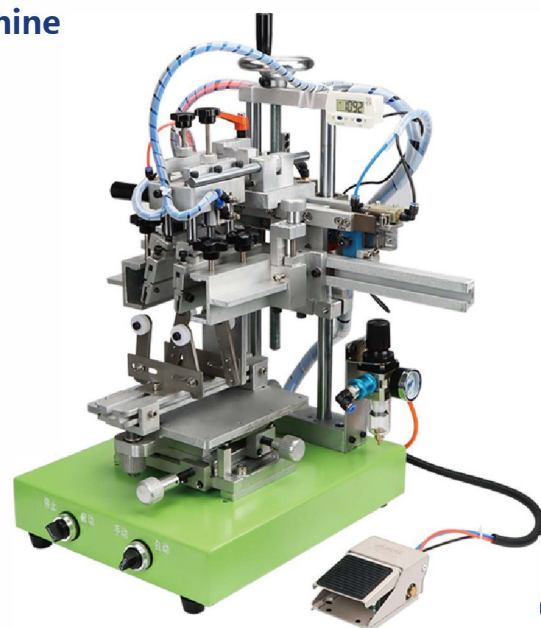

S100

应用范围/Scope of Application

可用于印刷口红管、唇彩瓶、睫毛膏瓶等彩妆产品的瓶身。或是果汁、汽水等玻璃瓶装饮料瓶的瓶身。药品包装瓶等圆柱形物体的印刷。

It can be used to print lipstick tubes, lip gloss bottles, mascara bottles and other bottles of makeup products. Or the bottle body of glass bottled beverage bottles such as fruit juice, soft drink, etc. Printing of cylindrical objects such as medicine packaging bottles.

立 式两用丝印机

Vertical Dual-purpose Screen Printing Machine

立式两用丝印机，曲面印刷还可改装成平面印刷。以适应不同的印刷需求。立式结构使机器在印刷过程中更加稳定，能够有效减少震动和晃动，从而提高印刷精度。

Vertical dual-purpose screen printing machine, curved surface printing can also be converted into flat printing. To adapt to different printing needs. Vertical structure makes the machine more stable in the printing process, and can effectively reduce vibration and shaking, thus improving printing accuracy.



400A



300A

参数/Parameters

型号 Model	印刷直径(mm) Printing Diameter	曲面最大印刷面积(mm) Max. print area on round surface	平面最大印刷面积(mm) Max. print area on flat surface	网版最大外径(mm) Max. outer diameter of the screen
300A	80	80*200	200*250	300*500
400A	110	110*200	200*350	300*560
型号 Model	印刷速度(次/时) Printing speed (Pcs/h)	气压(bar) Pressure	产品尺寸(mm) Product size	产品重量(kg) Product weight
300A	1200	4-5	750*850*1250	120
400A	1200	4-5	850*850*1250	140

应用范围/Scope of Application

两用丝印机，广泛应用于唇膏外壳、睫毛膏管、化妆水瓶、饮料瓶、保温杯、塑料杯、奶瓶、礼品盒、礼品袋等的曲面部分印刷或是T恤、玻璃、等平面产品的表面印刷。

Dual-purpose screen printing machine, widely used in lipstick shell, mascara tube, cosmetic bottles, beverage bottles, thermos cups, plastic cups, milk bottles, gift boxes, gift bags, etc. curved surface part of the printing or T-shirt, glass, and other flat products surface printing.

流水线丝印机

Flow Line Screen Printing Machine

平面流水线一体印刷机采用步进电机精准输送定位；自动印刷；自动出料为一体，可加装隧道炉；省时、省力、易用、高效率、高精度；不仅生产效率会大大提高，而且减少人工成本。

Plane assembly line all-in-one printing machine adopts stepping motor precise conveying and positioning; automatic printing; automatic discharging as a whole, can be added with tunnel furnace; time-saving, labor-saving, easy to use, high efficiency, high precision; not only the production efficiency will be greatly improved, but also to reduce the cost of labor.



4060LN



4060LV

真空吸气工作台
Vacuum adsorption worktop



参数/Parameters

型号 Model	4060LN	4060LV	4060PCV
产品尺寸(cm) Product Size	2600*1140*1750	2720*1030*1600	2720*1030*1600
流水线皮带尺寸(mm) Line Belt Size	2500*600	2500*600	2500*600
最大打印尺寸(mm) Max.printing size	350*550	350*550	350*550
最大框架尺寸(mm) Max.Framen Size	500*800	500*800	500*800
重复套印精度(mm) Repeat Accuracy	±0.08	±0.08	±0.08
打印厚度(mm) Printing Thickness	80	80	80
打印速度(Pcs/h) Printing Speed	800-1200	800-1200	800-1200
上下驱动模式 Up And Down Drive Mode	Pneumatics	Pneumatics	Pneumatics
左右驱动模式 Laft And Right Drive Mode	Pneumatics	Electric Powered	Electric Powered
重量(kg) Product Weight	180	180	680
气压(Bar) Air Preeure	5-6	5-6	5-6
功率(W) Power	40	40	6000
电压(V) Voltage	AC220	AC220	AC380



4060PCV

真空吸气工作台
Vacuum adsorption worktop

应用范围/Scope of Application

广泛应用于电子电器行业、塑料五金行业、服装纺织行业、包装行业等。工作台带有真空吸附功能，能印刷塑料袋等轻薄的产品。还可增加隧道炉，可印刷后一体式快速烘干。

Widely used in electronic and electrical appliances industry, plastic hardware industry, clothing and textile industry, packaging industry and so on. The working table with vacuum adsorption function can print light and thin products such as plastic bags. Can also add tunnel oven, can be printed after the one-piece rapid drying.

大型斜臂式丝印机

Large Inclined Arm Screen Printing Machine

大型斜臂丝印机，斜臂设计使得丝网版与承印物之间的距离调节更加灵活方便。吸气装置将承印物牢牢吸附固定，确保印刷过程中承印物不会发生位移，保证印刷精度。

Large slanting arm screen printing machine, slanting arm design makes it more flexible and convenient to adjust the distance between the screen plate and the substrate. The suction device adsorbs and fixes the substrate firmly, ensuring that the substrate will not be displaced during the printing process and guaranteeing printing accuracy.



参数/Parameters

型号 Model	DL-6090
产品尺寸(cm) Product size	150*120*125
工作台面尺寸(cm) Worktop size	72*100
最大打印尺寸(cm) MAX. PRINT SIZE	60*90
网版上升高度(cm) Screen Rise Height	30
产品重量(kg) Weights	410
最大网版尺寸(cm) Max. Screen Size	90*120
最小网版尺寸(cm) Min. Screen Size	45*55
打印速度(Pcs/h) Speed	500-1200
功率(Kw) Power	2.3

立式两用丝印机

Vertical Dual-purpose Screen Printing Machine

立式两用丝印机，曲面印刷还可改装成平面印刷。以适应不同的印刷需求。立式结构使机器在印刷过程中更加稳定，能够有效减少震动和晃动，从而提高印刷精度。**每个型号均有两款颜色可选。**

Vertical dual-purpose screen printing machine, curved surface printing can also be converted into flat printing. To adapt to different printing needs. Vertical structure makes the machine more stable in the printing process, and can effectively reduce vibration and shaking, thus improving printing accuracy.**Each model is available in two colors.**



600A



800A

参数/Parameters

型号 Model	印刷直径(mm) Printing Diameter	最大印刷面积(mm) Max. printing area	重复套印精度(mm) Repeat accuracy	网版最大外径(mm) Max. outer diameter of the screen
600A	170	550*300	±0.05	400*720
800A	240	750*300	±0.05	400*1000
型号 Model	印刷速度(次/时) Printing speed (Pcs/h)	气压(bar) Pressure	产品尺寸(mm) Product size	产品重量(kg) Product weight
600A	800	4-5	950*1250*1350	160
800A	1000	4-5	1450*1450*1450	200

应用范围/Scope of Application

两用丝印机，广泛应用于饮用水外壳、棒球杆、化妆水瓶、饮料瓶、保温杯、咖啡杯、奶茶杯、礼品盒、清洗剂瓶等的曲面部分印刷或是T恤、玻璃、等平面产品的表面印刷。

Dual-purpose screen printing machine, widely used in drinking water shells, baseball bats, cosmetic bottles, beverage bottles, thermos cups, coffee cups, milk tea cups, gift boxes, detergent bottles, etc. curved surface part of the printing or T-shirt, glass, and other flat products surface printing.

应用范围/Scope of Application

广泛应用于烟、酒、茶、药、化妆品等各类产品的包装盒印刷。也可用于印刷各种海报、宣传画、广告牌、挂历、年画等广告宣传材料。还用于在纺织品上印刷各种图案、花纹和文字，如T恤、卫衣、背包等。

Widely used in the printing of packaging boxes for all kinds of products such as cigarettes, wine, tea, medicine, cosmetics and so on. It can also be used for printing all kinds of posters, posters, billboards, calendars, yearbooks and other advertising and promotional materials. It is also used for printing all kinds of designs, patterns and words on textiles, such as T-shirts, sweatshirts, backpacks and so on.



自动对齐曲面丝印机

Automatic Alignment Surface Screen Printing Machine

自动对齐功能能够确保丝印图案与承印物曲面的位置精确匹配，有效避免了印刷图案的偏移、错位等问题，提高了印刷质量和产品的一致性。在自动对齐完成后，通过刮板挤压油墨，使油墨通过丝网印版的网孔转移到承印物的曲面上，完成印刷过程。

The automatic alignment function ensures that the position of the screen printing pattern and the surface of the substrate are precisely matched, effectively avoiding problems such as offset and misalignment of the printing pattern and improving the printing quality and product consistency. After the automatic alignment is completed, the ink is squeezed by the squeegee, so that the ink is transferred to the surface of the substrate through the mesh of the screen printing plate to complete the printing process.



参数/Parameters

型号 Model	400CF
最大印刷直径(mm) Max. printing diameter	110
最大网框外径尺寸(mm) Max. frame O.D. size	300*500 no vacuum
自动对位功能 Auto-alignment	Yes
重复套印精度(mm) Repeat overprint accuracy	±0.05
电压(V) Voltage	AC220
印刷速度(Pcs/h) Printing speed	600-800
机器尺寸(mm) Product Size	900*950*1700
产品旋转驱动方式 Product rotation drive method	伺服电动 Servo-electric
抬板上下驱动方式 Lift plate up and down drive method	变频电机 Variable Frequency Motors
左右印刷驱动方式 Left and right printing drive method	伺服电动 Servo-electric
重量(kg) Product weight	280
气源压力(mm) Air pressure	5~6
功率(W) Power	3000

应用范围/Scope of Application

应用范围十分广泛，例如化妆品包装：唇膏外壳、化妆品瓶子等，可印制品牌标识、图案、成分说明等。像洗涤剂瓶子、沐浴露瓶子等，能印刷品牌商标等。食品饮料包装：例如饮料瓶、酒瓶、塑料杯、奶茶杯、保温杯等多色印刷。

The range of applications is very wide, such as cosmetic packaging: lipstick shells, cosmetic bottles, etc., which can be printed with brand logos, patterns, and ingredient descriptions. Like detergent bottles, shower gel bottles, etc., can be printed with brand logo, etc. Food and beverage packaging: such as beverage bottles, wine bottles, plastic cups, milk tea cups, insulation cups and other multi-color printing.

全自动曲面丝印机

Automatic Curved Surface Screen Printing Machine

采用先进的定位系统和印刷技术，能够实现高精度的印刷效果，确保图案和文字的清晰、准确。从送料、印刷到收料，整个过程可实现全自动化操作，大大提高了生产效率。

Adopting advanced positioning system and printing technology, it is able to realize high-precision printing effect and ensure clear and accurate patterns and texts. From feeding, printing to receiving, the whole process can realize fully automatic operation, which greatly improves the production efficiency.



参数/Parameters

型号 Model	DL1845 (单色/Monochrome)	DL1846 (多色/Multicolor)
印刷速度(Pcs/h) Printing speed	3600-4800	1800-2400
网框尺寸(mm) Mesh frame size	180*450	180*450
最大印刷直径(mm) Max. printing diameter	110	110
印刷工位 Printing station	8/12	8/12
电压(V) Voltage	AC220	AC220
气压(mpa) Pressure	0.4-0.8	0.4-0.8
机器尺寸(mm) Product Size	1300*1200*1950	1300*1200*1950
含输送线尺寸(mm) Including conveyor line size	3500*2500*1950	3500*2500*1950
功率(W) Power	7kw	7kw
旋转转盘直径(mm) Diameter of rotating turntable	600	600
旋转方式 Rotation scheme	旋转台 Rotating platform	旋转台 Rotating platform

应用范围/Scope of Application

应用广泛，化妆品瓶、药瓶、饮料瓶等各种包装容器的表面印刷。或是塑料杯、奶茶杯、咖啡杯等的表面印刷。也可在玻璃瓶、玻璃杯等玻璃曲面制品上进行印刷，实现装饰和标识的功能。

Widely used, surface printing of various packaging containers such as cosmetic bottles, medicine bottles, beverage bottles, etc. Or surface printing on plastic cups, milk tea cups, coffee cups and so on. It can also be printed on glass curved products such as glass bottles, glass cups, etc. to realize the functions of decoration and marking.

小

转盘平面丝印机

Small Turntable Flat Screen Printing Machine

印刷平衡稳，震动小，精度高，可设置手动/半自动/全自动多种模式，印刷动作间接时间可数字控制。整机全套封装，免维护。安全美观，操作简单，取物方便，极大地提高了生产效率。

Printing balance is stable, small vibration, high precision, manual/semi-automatic/full-automatic modes can be set, printing action indirect time can be digitally controlled. The whole machine is fully encapsulated and maintenance free. Safe and beautiful, easy to operate, easy to pick up, greatly improving production efficiency.



参数/Parameters

型号 Model	DLO480R-2
最大印刷面积(mm) Max. printing area	120*250
最大网框外径(mm) Max. frame outer diameter	400*550
工作台尺寸(mm) Worktop size	150*300
重复打印精度(mm) Repeat Printing Accuracy	±0.05
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	50
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	810*1080*1650
上下驱动方式 Up/down drive method	气动 Pneumatic
左右驱动方式 Left/right drive mode	变频电机 Electric powered
产品重量(kg) Product weight	280
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

适合印制PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、薄膜开关电路、手机镜片、玻璃，液晶显示板，标牌，PVC片材，花纸等平面型材质。

Suitable for printing PCB, silicone, textile, plastic keypad, PET cardboard, nameplate, trademark, IC board, membrane switch circuit, cell phone lens, glass.Liquid crystal display board, signage, PVC sheet, flower paper and other flat type materials.

跑

台丝印机

Running Table Flat Screen Printing Machine

触摸屏操作系统配合变频器编译动作程序，经久耐用，维护简单；钢结构加铸铝机身，双柱式升降结构，精度高，运行平稳；精磨高强硬度工作台，均布吸气孔，强力真空吸附，保证多色套色准确。

Touch screen operating system with frequency converter compiled action program, durable, simple maintenance; steel structure with cast aluminum body, double-column lifting and lowering structure, high precision, stable operation; precision grinding high hardness worktable, uniformly distributed suction holes, strong vacuum adsorption, to ensure the accuracy of multi-color color registration.



参数/Parameters

型号 Model	DLO4060MMF
最大印刷面积(mm) Max. printing area	300*500
最大网框外径(mm) Max. frame outer diameter	500*800
工作台尺寸(mm) Worktop size	400*600
重复打印精度(mm) Repeat Printing Accuracy	±0.05
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1480*1120*1750
上下驱动方式 Up/down drive method	气动 Pneumatic
左右驱动方式 Left/right drive mode	变频电动 Electric powered
产品重量(kg) Product weight	250
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

应用广泛于平面承印物，适合多品种、如服装纺织类的T恤、帆布包等图案印刷或是大幅面海报、纸箱LOGO 及产品信息印刷。也适合工艺品 / 日用品：陶瓷、玻璃、鼠标垫等平面图案定制。

Widely used in flat substrates, suitable for multiple varieties, such as clothing and textile T-shirts, canvas bags and other graphics printing or large format posters, carton LOGO and product information printing. Also suitable for crafts / daily necessities: ceramics, glass, mouse pads and other flat pattern customization.

电 动立式丝印机

Electric Vertical Screen Printing Machine

此款丝印机，做工精细，实用性强，性价比高；微电脑控制系统，自动化程度高，操作简单，综合性微调装置，适应不同的印刷需求。 **(可选真空台面)**

This screen printing machine, fine workmanship, practicality, cost-effective; microcomputer control system, high degree of automation, easy to operate, comprehensive fine-tuning device to adapt to different printing needs.**(Optional vacuum worktop)**



参数/Parameters

型号 Model	DLO3050HMM
最大印刷面积(mm) Max. printing area	250*350
最大网框外径(mm) Max. frame outer diameter	400*700
工作台尺寸(mm) Worktop size	300*500
重复打印精度(mm) Repeat Printing Accuracy	±0.08
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1000*750*1600
上下驱动方式 Up/down drive method	变频电机 Electric powered
左右驱动方式 Left/right drive mode	变频电机 Electric powered
产品重量(kg) Product weight	250
气压(bar) Pressure	5-6
功率(w) Power	40

应用范围/Scope of Application

广泛应用于，PCB 板、电子元件、半导体封装印刷。LCD/OLED 面板、光学镜片标识。手表零件、医疗器械、金属外壳 LOGO 及纹路。高端礼盒烫金 / 防伪印刷、陶瓷 / 玻璃文创定制。锂电池极片、汽车仪表盘 / 方向盘标识印刷。

Widely used in PCB boards, electronic components, semiconductor package printing, LCD/OLED panels, optical lens marking. Watch parts, medical equipment, metal casing LOGO and texture. High-end gift box hot stamping / anti-counterfeiting printing, ceramics / glass customization. Lithium battery pole piece, automobile dashboard / steering wheel logo printing.

电 动立式丝印机

Electric Vertical Screen Printing Machine

触摸屏操作系统配合变频器编译动作程序，经久耐用，维护简单；双柱式升降结构，精度高，运行平稳；刮刀恒压装置，确保印刷过程中的压力稳定；高精度微调工作台，带自锁装置；工作台面配备急停装置，防止夹伤手。

Touch screen operating system with frequency converter compiled action program, durable, simple maintenance; double-column lifting and lowering structure, high precision, smooth operation; squeegee constant pressure device to ensure stable pressure in the printing process; high-precision micro-adjustable table with self-locking device; working table is equipped with an emergency stop device, to prevent clamping the hand.



参数/Parameters

型号 Model	DLO4060MMV
最大印刷面积(mm) Max. printing area	350*550
最大网框外径(mm) Max. frame outer diameter	500*800
工作台尺寸(mm) Worktop size	400*600
重复打印精度(mm) Repeat Printing Accuracy	±0.08
电压(v) Voltage	AC220
最大印刷高度(mm) Max. print height	80
印刷速度(次/时) Printing speed (Pcs/h)	1200
产品尺寸(mm) Product Size	1120*950*1700
上下驱动方式 Up/down drive method	变频电动 Electric powered
左右驱动方式 Left/right drive mode	变频电动 Electric powered
产品重量(kg) Product weight	320
气压(bar) Pressure	5-6
功率(w) Power	500

应用范围/Scope of Application

适合印制PCB、硅胶、纺织品、塑料按键、PET纸板、铭板、商标、IC板、服装纺织类的T 恤、帆布包等图案印刷或是大幅面海报、纸箱 LOGO 及产品信息印刷等平面型材质。

Suitable for printing PCB, silicone, textile, plastic keypad, PET cardboard, nameplate, trademark, IC board, clothing and textile T-shirt, canvas bag and other pattern printing or large-size posters, carton LOGO and product information printing and other flat materials.

双工位丝网印刷机

Double Worktop Screen Printing Machine

自动的四位数计数器，统计印刷数量。全铸铝式机身，表面喷粉烤漆，双柱式升降结构，平稳精度高。不锈
钢材质工作台，经久耐用，历久弥新。整机运行速度快，平稳，噪音小。

Automatic four-digit counter to count the number of prints. Full cast aluminum type body, surface powder coating and
baking varnish, double-column lifting structure, smooth and high precision. Non-show steel worktable, durable and
everlasting. The whole machine running fast, smooth, low noise.



参数/Parameters

型号 Model	DLO70100SMV-2
工作台尺寸(mm) Worktop size	700*1000
产品尺寸(mm) Product size	2520*1320*1610
最大印刷面积(mm) Cartridge capacity	600*900
最大网版尺寸(mm) Information storage	800*1320
印刷高度(mm) Power	80
上下驱动方式 Up/down drive method	电动/electric powered
左右驱动方式 Left/right drive method	电动/electric powered

应用范围/Scope of Application

适合印制服装，包包等帆布材质产品。或是包
装制品：纸箱、纸盒、塑料包装袋的品牌
LOGO、产品信息、条形码印刷。PCB、硅胶
、纺织品、塑料按键、PET纸板、铭板、商标
、IC板、薄膜开关电路、手机镜片、玻璃，
液晶显示板，标牌，PVC片材，花纸等平面型
材质。

Suitable for printing clothing, bags and other
canvas material products. Or packaging products:
carton, carton, plastic bags, brand LOGO, product
information, bar code printing, PCB, silicone,
textiles, plastic buttons, PET cardboard, name-
plate, logo, IC board, membrane switch circuit, cell
phone lenses, glass, LCD board, signage, PVC
sheet, flower paper and other flat type material.